



Firmware Version: 2.02rc021
Published Date: 2015/01/20

Content:

Upgrading Instructions:..... 2

 Upgrading by using Web-UI..... 2

New Features:..... 3

Changes of MIB & D-View Module:..... 3

Problems Fixed: 3

Known Issues: 3

Related Documentation: 3

Revision History and System Requirement:

Firmware Version	Date	Model	Hardware Version
2.01rc012	2014/09/05	DAP-2360	B1


Upgrading Instructions:

D-Link AP supports firmware upgrading via Web-UI. You may download the firmware from D-Link web site <http://tsd.dlink.com.tw>.

Upgrading by using Web-UI

1. Connect a work station to the LAN port of Access Point.
2. Open the web browser of work station and entering the IP address of the AP. The system default IP address is 192.168.0.50.
3. Enter administrator's username and password, user name is "admin" and leave the password field blank by default.

To update the AP's firmware, click **Maintenance > Firmware and SSL Certification Upload**

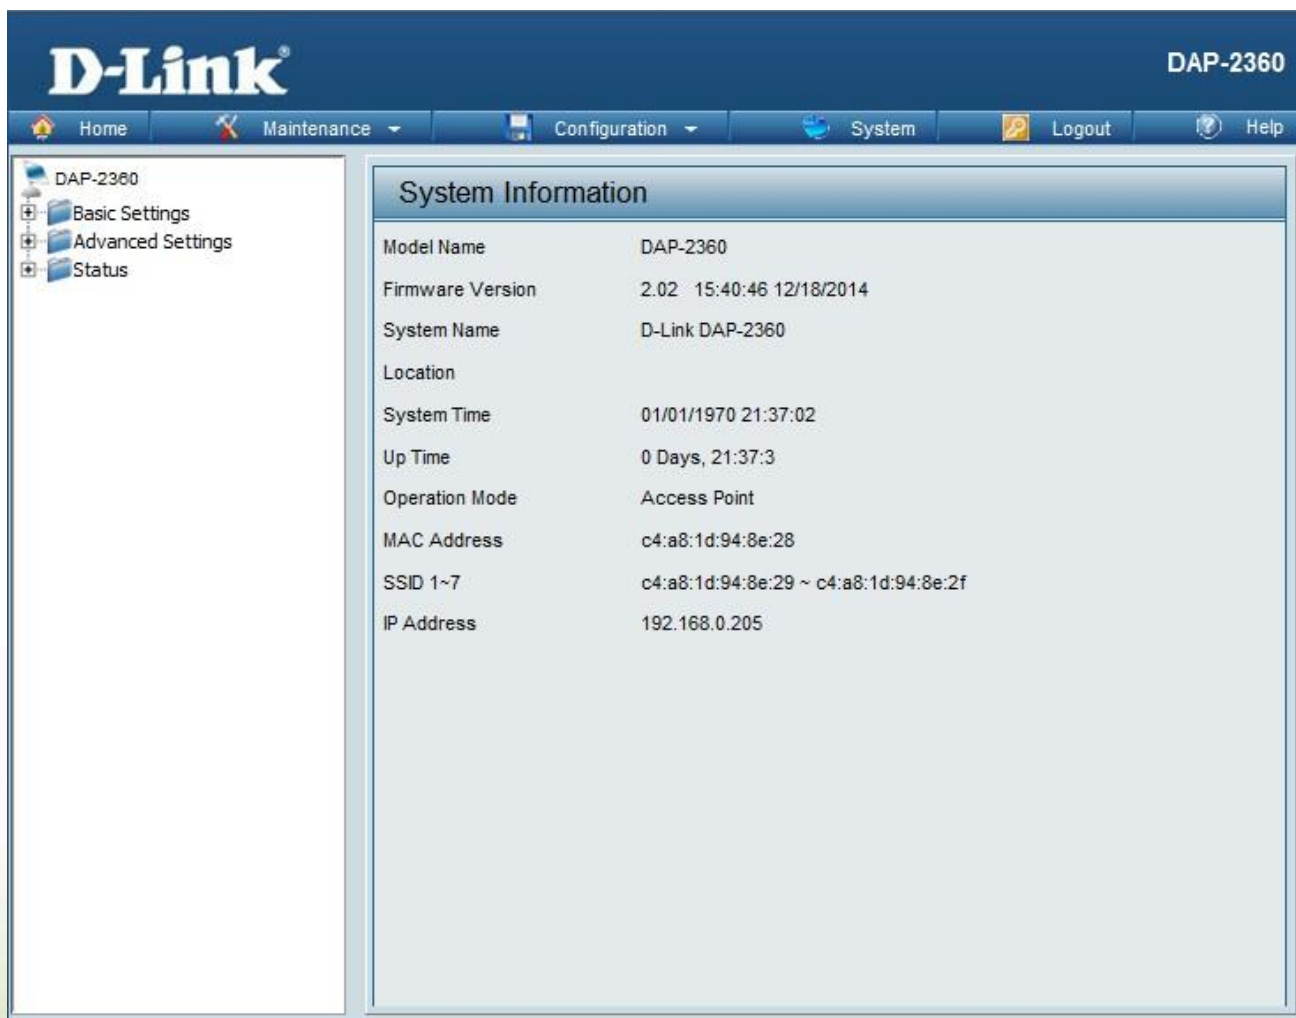

The screenshot shows the D-Link DAP-2360 Web-UI interface. The top navigation bar includes links for Home, Maintenance, Configuration, System, Logout, and Help. The left sidebar shows a tree view with DAP-2360, Basic Settings, Advanced Settings, and Status. The main content area displays the 'System Information' page, which lists various system parameters:

System Information	
Model Name	DAP-2360
Firmware Version	2.02 15:40:46 12/18/2014
System Name	D-Link DAP-2360
Location	
System Time	01/01/1970 21:37:02
Up Time	0 Days, 21:37:3
Operation Mode	Access Point
MAC Address	c4:a8:1d:94:8e:28
SSID 1~7	c4:a8:1d:94:8e:29 ~ c4:a8:1d:94:8e:2f
IP Address	192.168.0.205

New Features:

Support CWM v1.01

1. Session timeout customization for Captive Portal (10 to 1440 minutes)
2. Support external syslog server for EU directive
3. Dashboard display site and network name at each connected device
4. Dashboard display the current SSID instead of Primary SSID

Changes of MIB & D-View Module:

CWM_DAP2360B v2.02-R14

Problems Fixed:

Firmware Version	Problems Fixed
V2.02	1. Clear text for captive portal login 2. Fix Rogue AP scan cause the sorted result reset 3. BTD2014110085-CPU usage reach 100%, cannot login Web UI. 4. BTD2014110088-IPv6 packets cause AP kernel panic. 5. BTD2014110090-STA cannot associate with AP. 6. BTD2014110091-AP stop sending syslog to syslog server 7. BTD2014110092-Bandwidth control cannot control VLAN upload traffic

Known Issues:

Firmware Version	Known Issues
V2.02	None

Related Documentation:

- DAP-2360 User Manual v2.01