



Firmware Version: 3.16rc100
Published Date: 2016/10/03

Content:

Upgrading Instructions:..... 2

 Upgrading by using Web-UI 2

New Features:..... 3

Changes of MIB & D-View Module:..... 3

Problems Fixed: 3

Known Issues: 3

Related Documentation: 3

Revision History and System Requirement:

Firmware Version	Date	Model	Hardware Version
3.11rc078	2015/01/20	DAP-2690	B1
3.15rc091	2015/07/09		
3.16rc100	2016/03/29		


Upgrading Instructions:

D-Link AP supports firmware upgrading via Web-UI. You may download the firmware from D-Link web site <http://tsd.dlink.com.tw>.

Upgrading by using Web-UI

1. Connect a work station to the LAN port of Access Point.
2. Open the web browser of work station and entering the IP address of the AP. The system default IP address is 192.168.0.50.
3. Enter administrator's username and password, user name is "admin" and leave the password field blank by default.

To update the AP's firmware, click **Maintenance > Firmware and SSL Certification Upload**

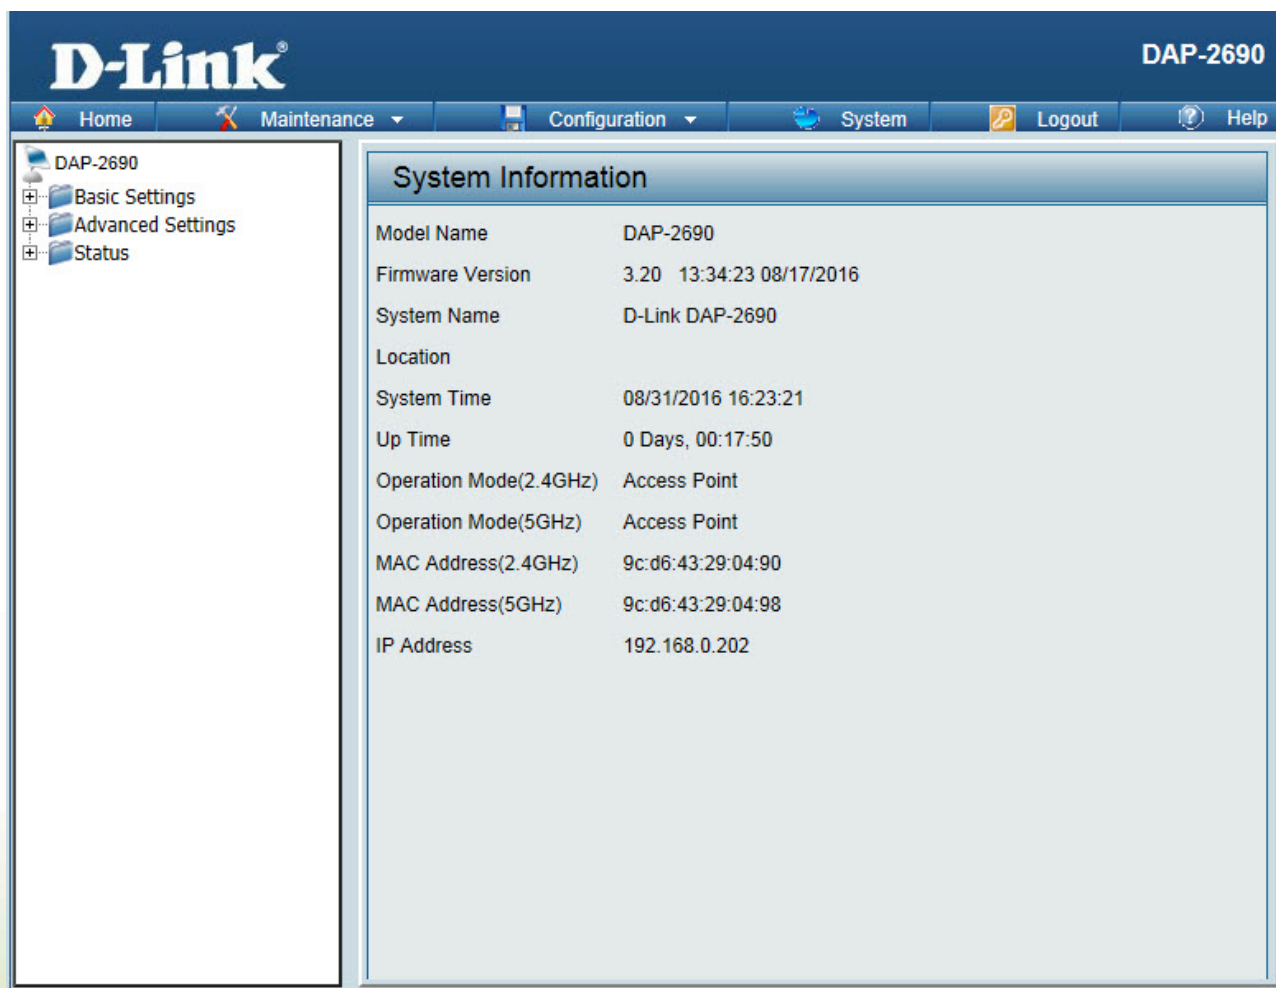

The screenshot shows the D-Link DAP-2690 Web-UI interface. The top navigation bar includes links for Home, Maintenance, Configuration, System, Logout, and Help. The left sidebar shows a tree view with DAP-2690, Basic Settings, Advanced Settings, and Status. The main content area displays the 'System Information' page, which lists the following details:

System Information	
Model Name	DAP-2690
Firmware Version	3.20 13:34:23 08/17/2016
System Name	D-Link DAP-2690
Location	
System Time	08/31/2016 16:23:21
Up Time	0 Days, 00:17:50
Operation Mode(2.4GHz)	Access Point
Operation Mode(5GHz)	Access Point
MAC Address(2.4GHz)	9c:d6:43:29:04:90
MAC Address(5GHz)	9c:d6:43:29:04:98
IP Address	192.168.0.202

New Features:

1. Support CWM v1.03
2. Support Captive portal with Multiple SSID and VLAN
3. Captive portal support https URL redirect
4. Display station's OS in client information for Captive portal client
5. One SSID with multiple schedule settings
6. MAC ACL from per SSID 64 to per radio share 512
7. Support External captive portal in CWM mode
8. Country selection for specific country code

Changes of MIB & D-View Module:

None

Problems Fixed:

Firmware Version	Problems Fixed
V3.20	1. Fix there is channel overlap phenomenon when Auto RF Optimize for AP Array. 2. Fix DBG16070013->IPv6 without need authentication could connect to internet

Known Issues:

Firmware Version	Known Issues
V3.20	None

Related Documentation:

- DAP-2690 User Manual v3.13(US)/v3.12(EU)