



Firmware Version: 1.20rc075
Published Date: 2016/09/14

Content:

Upgrading Instructions:..... 2

 Upgrading by using Web-UI 2

New Features:..... 3

Changes of MIB & D-View Module:..... 3

Problems Fixed: 3

Known Issues: 3

Related Documentation: 3

Revision History and System Requirement:

Firmware Version	Date	Model	Hardware Version
1.11rc044	2015/01/20	DAP-2695	A1
1.16rc053	2016/03/18		
1.17rc063	2016/03/18		


Upgrading Instructions:

D-Link AP supports firmware upgrading via Web-UI. You may download the firmware from D-Link web site <http://tsd.dlink.com.tw>.

Upgrading by using Web-UI

1. Connect a work station to the LAN port of Access Point.
2. Open the web browser of work station and entering the IP address of the AP. The system default IP address is 192.168.0.50.
3. Enter administrator's username and password, user name is "admin" and leave the password field blank by default.

To update the AP's firmware, click **Maintenance > Firmware and SSL Certification Upload**

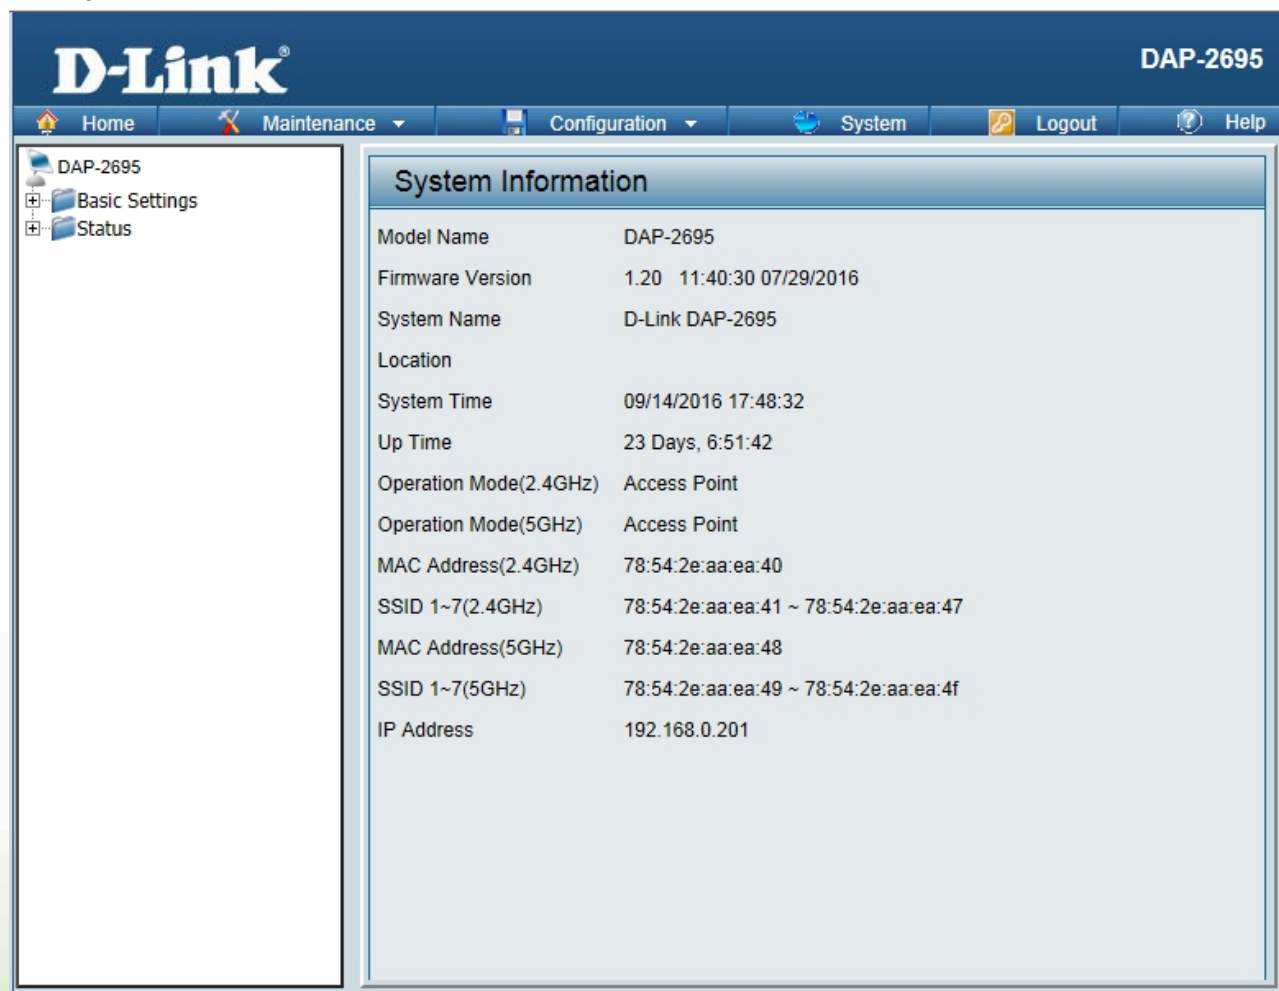

The screenshot shows the D-Link DAP-2695 Web-UI interface. The top navigation bar includes Home, Maintenance, Configuration, System, Logout, and Help. The left sidebar shows a tree view with DAP-2695, Basic Settings, and Status. The main content area is titled 'System Information' and displays the following details:

Model Name	DAP-2695
Firmware Version	1.20 11:40:30 07/29/2016
System Name	D-Link DAP-2695
Location	
System Time	09/14/2016 17:48:32
Up Time	23 Days, 6:51:42
Operation Mode(2.4GHz)	Access Point
Operation Mode(5GHz)	Access Point
MAC Address(2.4GHz)	78:54:2e:aa:ea:40
SSID 1~7(2.4GHz)	78:54:2e:aa:ea:41 ~ 78:54:2e:aa:ea:47
MAC Address(5GHz)	78:54:2e:aa:ea:48
SSID 1~7(5GHz)	78:54:2e:aa:ea:49 ~ 78:54:2e:aa:ea:4f
IP Address	192.168.0.201

New Features:

1. Support CWM v1.03
2. Support Captive portal with Multiple SSID and VLAN
3. Captive portal support https URL redirect
4. Display station's OS in client information for Captive portal client
5. One SSID with multiple schedule settings
6. MAC ACL from per SSID 64 to per radio share 512
7. Support External captive portal in CWM mode
8. Country selection for specific country code
9. Add language pack upload and remove function
10. Enable/disable STP

Changes of MIB & D-View Module:

None

Problems Fixed:

Firmware Version	Problems Fixed
V1.20	1. Fix if enable wlan partition, blocking access from lan to wlan, clients does not get ip address and not have network access. 2. Fix DBG16060127->Disable aparray if cwm is enabled. 3. Fix DBG16070013->IPv6 without need authentication could connect to internet 4. Fix DBG16070073->In WDS ping failed when configured 5G WDS with WPA/AES encryption

Known Issues:

Firmware Version	Known Issues
V1.20	None

Related Documentation:

- DAP-2695 User Manual v1.12(DI)/v1.13(US)/v1.13(EU)