

For use with Handheld or Pocket PCs with Windows CE in an “Ad Hoc” or “Infrastructure” network. *This guide is for installation purposes only. Please see your User’s Manual for more detailed information.*

Contents of Package:

- DCF-650W 11Mbps Wireless LAN Compact Flash Adapter
- Quick Install Guide
- Driver

If any of the above items are missing, please contact your reseller.

Before you start make sure that:


You have installed “Microsoft Active Sync” software on your computer or laptop and a connection has been established between the computer and the PDA.

Note: For more information on synchronizing your PDA to your computer, please read the User’s manual that came with your PDA.

1


Installing the DCF-650W Drivers

- **Insert** the driver CD that came with your DCF-650W into the CD-ROM drive on your computer.
- **The Autorun screen** will appear. Click the **Install Drivers** button to install the driver and utility with the PDA in the cradle.
Note: When asked for location, select default installation location.

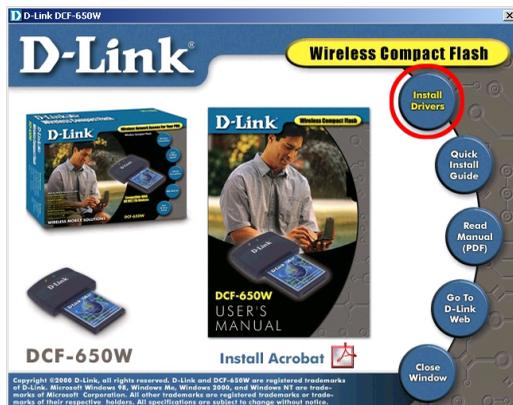


Installing the DCF-650W Drivers *Continued...*

Click **Next** to continue

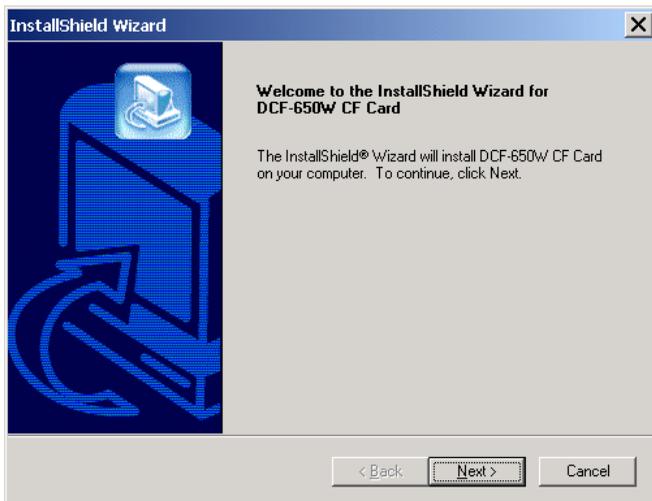

Click **Yes** to continue

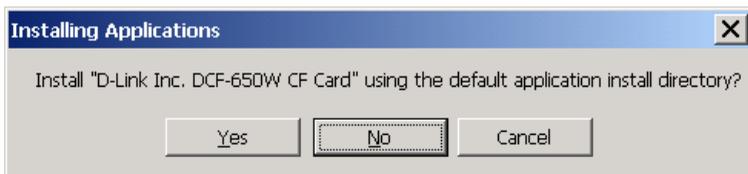

Click **OK** to continue



Click **Finish** to finish the installation



2

Inserting the DCF-650W Compact Flash Adapter

Remove the PDA from the cradle and turn off the unit.

Gently insert the *DCF-650W Compact Flash Adapter* into the Compact Flash card slot in your PDA. Now turn on the PDA. The PDA will auto-detect the *DCF-650W Compact Flash Adapter* and auto-install the corresponding driver.

Assign an IP address to your *DCF-650W Compact Flash Adapter*. You can now either pick a server assigned IP address (via DHCP) or use a specific IP address (Static IP).



Reset your PDA.

Go to Start, Settings, System and click the DCF-650W CF Card icon. Configure the parameters for your wireless environment.

The **DCF-650W Wireless Compact Flash Adapter** is a “ready-to-use” device. Its default settings are compatible with a typical **Infrastructure Wireless LAN**. If you choose to adjust the settings, please see the “Wireless LAN Settings” section of the User’s Manual.

TROUBLESHOOTING

Problem: WinCE returns to the prior application upon restarting.

You can exit the application (for instance, the Utility program) by using the PDA reset button.

Problem: The wireless connection to the Access Point disconnects.

Reset and force a connection by going to the “Utility” program>select “Config.”>check parameters>select “Modify” to force a re-connection.

Problem: The PDA “roams” to a new Access Point in a different subnet.

1. Unplug and re-insert the Wireless LAN Compact Flash Adapter
2. “Hard” reset your device to force a “release and renew” of a re-assignment of the IP Address in a DHCP Access Point environment.

CONTACTING TECHNICAL SUPPORT

You can find the most recent software and user documentation on the **D-Link** website.

D-Link provides free technical support for customers within the United States.

U.S. customers can contact **D-Link** technical support through our web site, e-mail, or by phone.

United States technical support is available Monday through Friday from 6:00 a.m. to 6:00 p.m. (PST.)

Web: <http://www.dlink.com>

Email: support@dlink.com

Phone: 949-788-0805 (option #4)

If you are a customer residing outside of the United States, please refer to the list of **D-Link** locations that is included in the User’s manual.