<section-header>

Wireless N Network Camera

Easily view and manage your camera from mydlink.com

1.0 Lux sensor can capture video in low-light conditions Draft 802.11n wireless connectivity

DCS-1130

The mydlink[™]-enabled Wireless N Network Camera (DCS-1130) comes with everything you need to quickly add a surveillance camera to your home or small office network. It works right out of the box. Simply connect the cables, plug in the camera, run the short installation wizard and setup is complete. To view what the camera is seeing, simply log on to mydlink.com, choose your device, and start viewing – there is no need to configure your router¹ to open up ports or remember hard-to-memorize Internet addresses.

Benefits of mydlink[™]

mydlink products are created for people who long to embrace a world connected through the Internet, but are afraid they lack the technical expertise to do so. mydlink products remove the learning curve that is typically associated with today's high-tech devices because they are truly plug-and-play with zero or extremely easy configuration. mydlink provides you easy and straightforward access to your digital life all from our intuitive, convenient website (www.mydlink.com). mydlink makes it easy to get the most from your digital lifestyle without the learning curve.

Convenient Access, Anywhere, Anytime

As a mydlink-enabled device, the DCS-1130 can be accessed anytime, anywhere you have an Internet connection. Get peace of mind by keeping an eye on your kids, pets, home or office from almost anywhere by simply logging on to the mydlink website and selecting your camera. Since the DCS-1130 comes with a built-in microphone, you can see and hear for yourself that everything is well at home. No computer available? Not to worry, the DCS-1130 provides 3GPP Mobile Surveillance², which enables you to view a live video feed from your compatible Internet-ready mobile phone with a 3GPP player installed. This helps you extend your monitoring capability without having to be at a computer, allowing you to check your camera's video feed while on-the-go.

Camera Management


For advanced users that want more out of their camera, the DCS-1130 also comes with D-Link D-ViewCam[™] management software. D-ViewCam comes with a host of features including the ability to record directly from the camera to a local hard drive, trigger motion detection, set recording schedules, set e-mail alert notifications, and even support for up to 32 cameras. D-ViewCam also allows you to upload a floor plan of your home or small business and create a realistic layout of where your cameras are located, providing you with better access to your camera. For even greater recording flexibility, you can record video directly to a Network Attached Storage (NAS) device, eliminating the need for a dedicated computer to store video.





DCS-1130

Your Network Setup

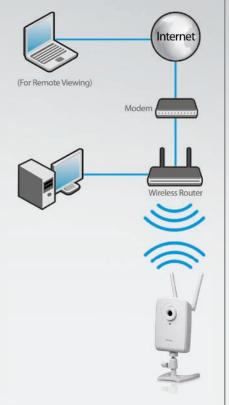

Ready To Use In 3 Simple Steps

Step 1: Set up and connect your DCS-1130



Step 2: Log on to mydlink.com



Step 3: Start viewing your camera's video feed



CAMERA SPECIFICATIONS

- + Sensor: 1/4" CMOS
- + Lens: 5.01mm, F2.8
- + Minimum Illumination: 1.0 Lux @ F2.8
- + 3A Control: AGC, AWB, AES
- + Electronic Shutter: 1/60 (1/50) ~ 1/15,000 sec.
- + 16x Digital Zoom

AUDIO

- + Built-in Omni-directional Microphone
- + Frequency: 50 ~ 16000Hz
- + S/N Ratio: 6mm, -40db + 3db

VIDEO FORMATS SUPPORTED

- + MPEG-4 and MJPEG (Simultaneous Dual Format
- Compression) + JPEG for Still Images

DISPLAY TYPE

- + ActiveX
- + Java

MULTI-PROFILE

Support 4 profiles simultaneously

FEATURES

- + Adjustable image size and quality
- + Time stamp and text overlay
- + Three configurable motion detection windows
- + Flip and Mirror

RESOLUTION

- + Up to 30 frames at 640x480
- + Up to 30 frames at 320x240
- + Up to 30 frames at 160x120

CONNECTIVITY

- + Wireless (Draft 802.11n) Network
- (Backward compatible with 802.11g)
- + Wired (10/100 Fast Ethernet) Network

SECURITY

Password Authentication

I FD

Power/Link

- ¹ Router must support UPnP[™] and Application Layer Gateway (ALG).
 ² The mobile device must be Internet-ready, support Real Time Streaming Protocol (RTSP) and be equipped with a 3G video player such as PacketVideo", QuickTime[™], or RealPayer[™], and have Internet access.
 ³ I-Year Limited Warranty available only in the USA and Canada.
- ⁴ Latest Software and Documentation available at http://support.dlink.com.

Use of audio or video equipment for recording the image or voice of a person without their knowledge and consent is prohibited in certain states or jurisdictions. Nothing herein represents a warranty or representation that the D-Link product provided herein is suitable for the end-user's intended use under the applicable laws of his or her state. D-Link disclaims any liability whatsoever for any end-user use of the D-Link product which fails to comply with applicable state, local or federal laws.

All references to speed are for comparison purposes only. Product specifications, size and shape are subject to change without notice, and actual product appearance may differ from that depicted on the package. See inside package for warranty details.

PC with SECURITY

Windows Vista® or

MINIMUM SYSTEM REQUIREMENTS

MULTIPLE CAMERA OPERATIONS REQUIRED Wireless (Draft 802.11n) Network

Windows Vista® or

CAT5 Ethernet Cable 2 Detachable Antennas Power Adapter Quick Installation Guide CD-ROM⁴ with Software

©2009 D-Link Corporation/D-Link Systems, Inc. All rights reserved. D-Link, the D-Link logo, the D-Link ROHS logo, D-ViewCam, and mydlink are in the United States and/or other countries. Other trademarks or registered trademarks are the property of their respective owners.

Technical Specifications

NEWORKING PROTOCOLS

- + IPV4, ARP, TCP, UDP, ICMP
- + DHCP Client
- + NTP Client (D-Link)
- + DNS Client
- + DDNS Client (D-Link)
- + SMTP Client
- + FTP Client + HTTP Server
- + Samba Client + PPPoE
- + UPnP Port Forwarding
- + RTP
- + RTSP
- + RTCP
- + 3GPP

CERTIFICATIONS

- + FCC Class B
- + 10
- + CE
- + C-Tick

POWER

- + External Power Supply: 5VDC, 2.5A
- + Consumption: 4 Watts Max

TEMPERATURE

- + Operating: 32° to 104°F (0° to 40°C)
- + Storage: -4° to 158°F (-20° to 70°C)

OPERATING HUMIDITY

20% ~ 80% RH Non-condensing

DIMENSIONS (L X W X H)

- + Item: 1.5" x 3.2" x 4.7" (38mm x 81mm x 119mm)
- + Packaging: 1.6" x 10.8" x 8.2" (41mm x 274mm x 208mm)

WEIGHT

- + Item: 0.5 lbs (226.8 g)
- + Packaging: 2.0 lbs (907.2g)

WARRANTY

1-Year Limited³

Internet Explorer® v6 or later

Wireless (Draft 802.11n) Network PC with

Wireless N Network Camera Camera Base and Mounting Kit Internet Explorer® v6 or later