

D-Link Quick Installation Guide

DCS-950

SECURICAM Network
10/100 Fast Ethernet
Audio Internet Camera

This product can be set up using Internet Explorer 6.x or above



Before You Begin

You must have at least the following:

- Windows 98/Me/2000/XP
- A CD-ROM drive
- An available Ethernet connection

Check Your Package Contents

These are the items included with your purchase:

If any of the below items are missing, please contact your reseller.



DCS-950 Internet Camera



CD-ROM with Manual and Installation Wizard



Mounting Bracket and Stand



CAT5 Ethernet Cable



5V 2.5A AC Power Adapter



Using a power supply with a different voltage rating will damage this product and void the warranty.

System Requirements

- Internet Explorer 6.x or above
- CPU: 800MHz or above
- Memory Size: 128MB (256MB recommended)
- VGA card resolution: 800x600 or above

Note: If using multiple cameras for viewing/recording, the minimum requirements are a 2GHz or above CPU with 512MB memory and a 32MB video card.

1

Hardware Installation

Connect the Ethernet Cable

Connect an Ethernet cable to the Ethernet connector located on the Internet Camera's back panel and attach it to the network.



If you connect this camera directly to a PC, the DCS-950 has an MDI/X port that will allow you to use either a straight through (included) or cross-over cable.

The LAN LED will light green when there is a good connection to the LAN. The LED will begin to flash indicating the camera is receiving or sending data.

Attach the External Power Supply

Attach the external power supply to the DC power input connector located on the Internet Camera's back panel (labeled DC 5V 2.5A) and connect it to an AC power outlet.




Power source is confirmed when the LED Power Indicator on the Internet Camera is illuminated.


2

Installing the Installation Wizard


Insert the **DCS-950** CD into the CD-ROM drive.

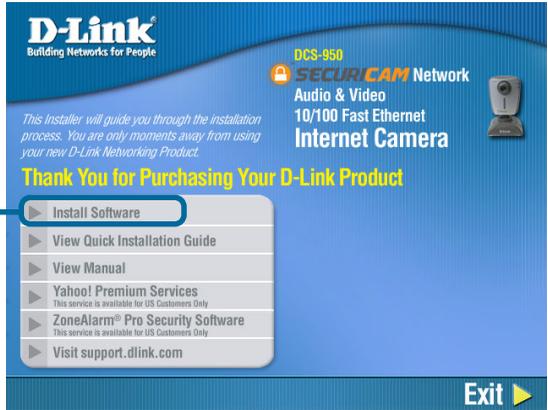

Click on **Install Software.**

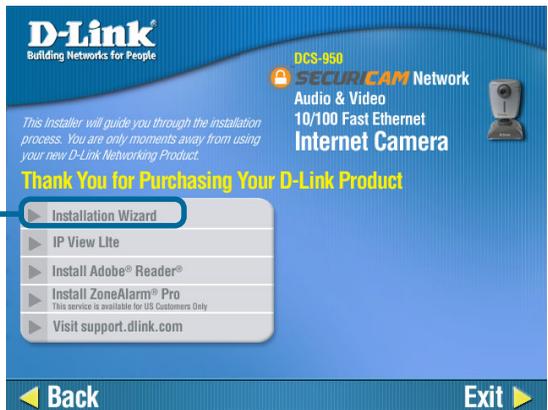

Click on **Installation Wizard.**

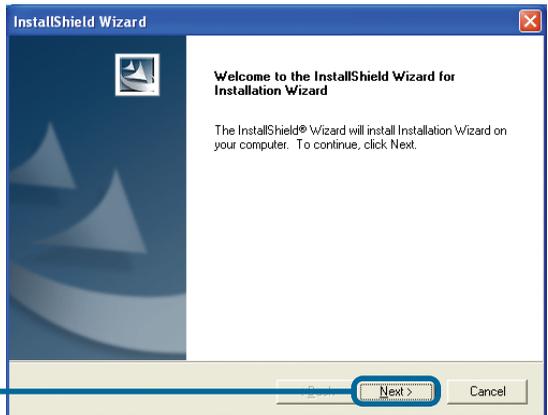


Click **Next.**


2

Installing the Installation Wizard (continued)


Click Yes.

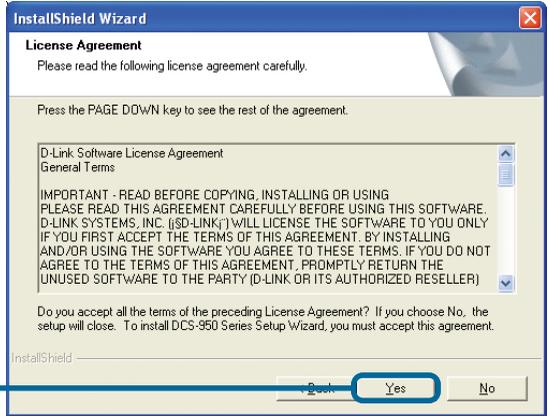

Click Next.

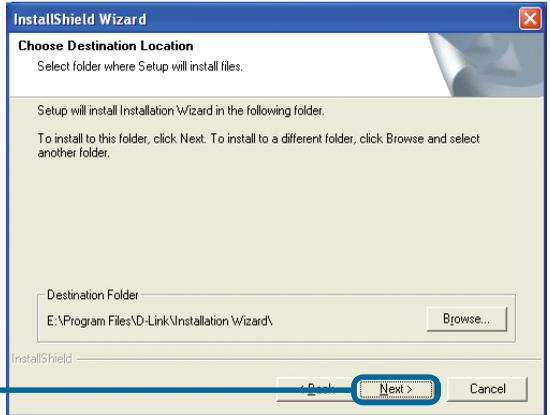


Click Next.

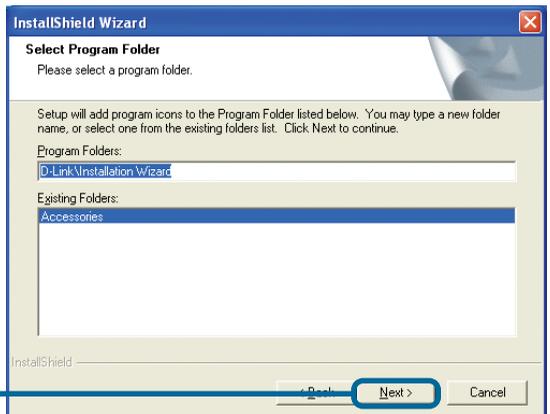


2

Installing the Installation Wizard (continued)

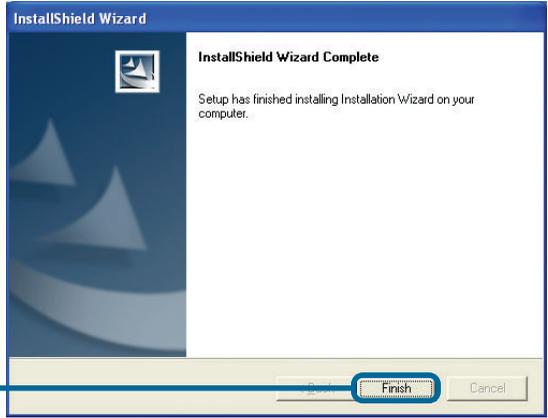


2


Installing the Installation Wizard (continued)

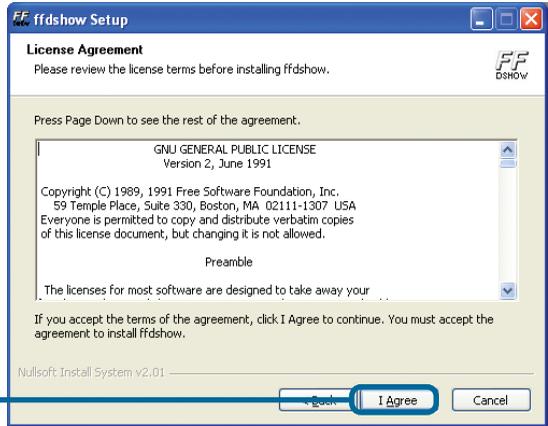

Click I Agree.

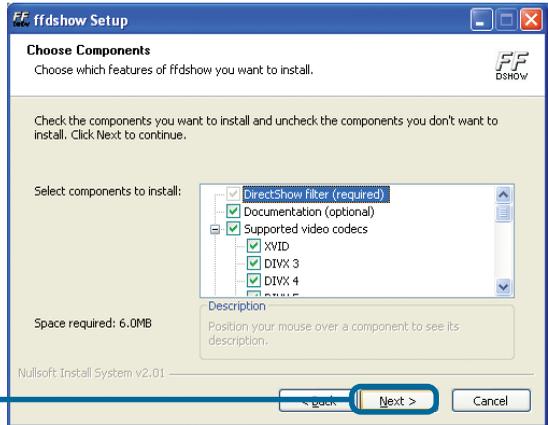


Click Next.

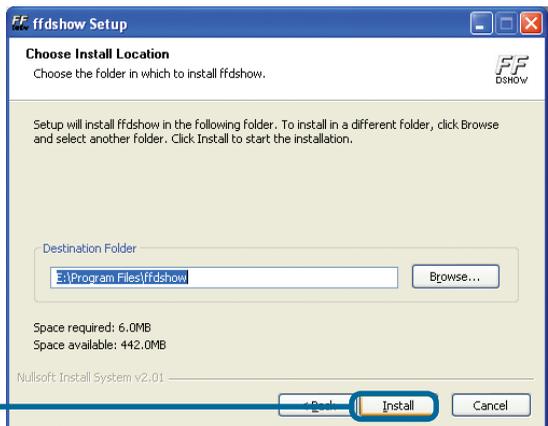

Click Install.

2

Installing the Installation Wizard (continued)

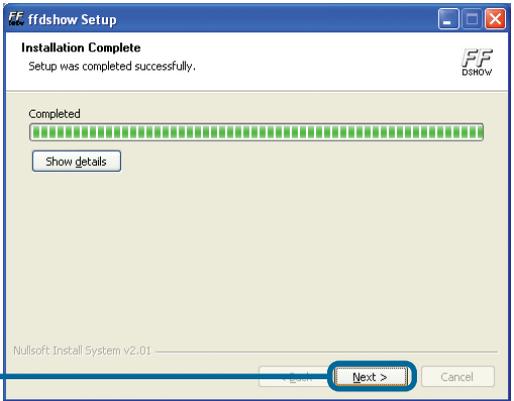

Click **Next**.



Click **Finish**.

3

Configuring Your Camera with the Setup Wizard

To run the Setup Wizard, click on **Start->Programs->DCS-950 Series Setup Wizard**.

Your camera's IP Address will be displayed here.

Click the **Wizard** button to begin.



By default, the **Admin ID** and **Password** are “admin” (lower case). Enter this in both fields. To change the Admin Password, select the **Change** box and enter a **New Password**.

Click **Next**.



The **IP Address**, **Subnet Mask**, and **Gateway** of your camera must correspond with your network settings for you to access the camera. If you are unsure of what these settings should be, please check with your network administrator.

Click **Next**.



3

Configuring Your Camera with the Setup Wizard (continued)

If you need to make any changes, click **Back** to modify your camera settings. Otherwise, click **Restart** to save and apply your settings. This may take a few minutes.

The screenshot shows the completion of the setup wizard. The top header includes the D-Link logo and the Securicam logo. Below the header, there are several input fields for configuration: Admin ID (admin), Password (masked with asterisks), IP Address (192.168.0.20), Subnet (255.255.255.0), DNS 1 (192.152.81.1), and DNS 2 (4.2.2.2). A message states: "The Setup Wizard has completed. Click on **Back** to modify your settings. Click **Restart** to save your current settings and reboot the DCS-950 Series Camera." At the bottom right, there are two buttons: "Back" and "Restart".

Click **Restart**.

Wait until the Link LED on the camera begins to flash. Click **Link** to launch your Web browser and view your images.

The screenshot shows the main interface of the Securicam web browser. The top header includes the D-Link logo and the Securicam logo. On the left side, there are two camera icons and a vertical menu with buttons: "Wizard", "Search", "Link", "Exit", and "About". The "Link" button is highlighted with a blue border. On the right side, there is a table with the following data:

Mac Address	Current IP Address	Assigned
00 03 1B 00 00 02	192.168.0.20	
00 03 1B 00 00 01	192.168.0.21	ok

Click **Link**.


4

Viewing Your Internet Camera

After you click the **Link** button, the **Installation Wizard** will automatically open your Web browser to the IP address of the **DCS-950** and prompt you for a user name and password. Enter “admin” into both fields. If you changed the user name and password in the setup wizard, enter the new values and click **Apply**.



After you successfully log in, the camera will be displayed in your Web browser. In this example the IP address of the camera is **http://192.168.0.20**. Your **DCS-950** may have a different IP Address.

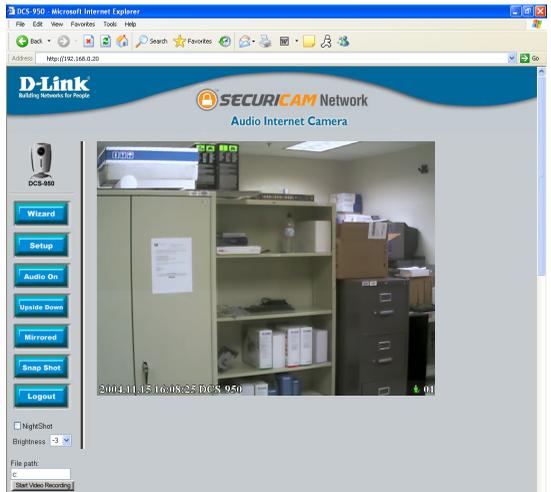

The installation and configuration of the DCS-950 Internet Camera is now complete.

Notes

Technical Support

You can find software updates and user documentation on the D-Link website.

D-Link provides free technical support for customers within the United States and within Canada for the duration of the warranty period on this product.

U.S. and Canadian customers can contact D-Link Technical Support through our website, or by phone.

Tech Support for customers within the United States:

D-Link Technical Support over the Telephone:

(877) 453-5465

24 hours a day, seven days a week.

D-Link Technical Support over the Internet:

<http://support.dlink.com>

[email:support@dlink.com](mailto:support@dlink.com)

Tech Support for customers within Canada:

D-Link Technical Support over the Telephone:

(800) 361-5265

Monday to Friday 7:30am to 12:00am EST

D-Link Technical Support over the Internet:

<http://support.dlink.ca>

[email:support@dlink.ca](mailto:support@dlink.ca)

