QUICK INSTALL GUIDE DHP-302


VERSION 1.0



D-Link®

POWERLINE HD

Hardware Overview

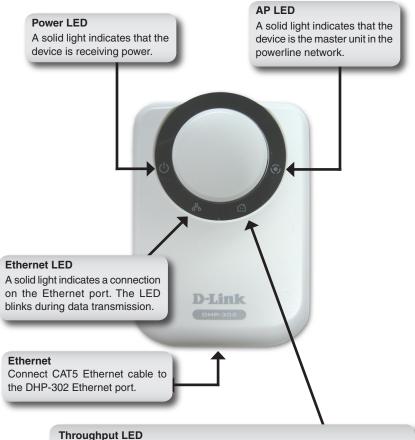

A solid light indicates that the device has detected another Powerline device on the network. The LED blinks during data transmission.

Green LED: Power Line speed > 20Mbps

Amber LED: Power Line speed < 20Mbps or > 6Mbps

Red LED: Power Line speed < 6Mbps or link is down.

Hardware Installation

Power


Plug the DHP-302 into an AC wall outlet.

Note: Power source is confirmed when the green LED Power Indicator on the DHP-302 is illuminated.

Connect the Ethernet Cable

Connect the included Ethernet cable to the network cable connector located on the DHP-302 and attach the other end of the Ethernet cable to the network or PC.

Note: Network Connectivity is confirmed when the green Powerline LED indicator on the DHP-302 is illuminated.

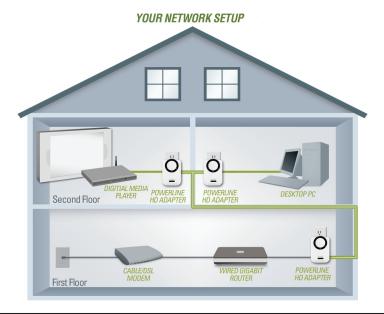

Technical Support

D-Link's website contains the latest user documentation and software updates for D-Link products.

U.S. and Canadian customers can contact D-Link Technical Support through our website or by phone.

United States

Telephone (877) 453-5465

World Wide Web http://support.dlink.com

Canada

Telephone (800) 361-5265

World Wide Web http://support.dlink.com



Version 1.0 June 30, 2008

Copyright ©2008 D-Link Corporation/D-Link Systems, Inc. All rights reserved. D-Link and the D-Link logo are registered trademarks of D-Link Corporation or its subsidiaries in the United States and other countries. Other trademarks are the property of their respective owners. Network conditions and environmental factors, including volume of network traffic, building materials and construction, and network overhead lower actual data throughput rate. Product specifications, size and shape are subject to change without notice, and actual product appearance may differ from that depicted on the packaging. Visit www.dlink.com for more details.