

D-Link Quick Installation Guide

This product can be set up using Internet Explorer 5.x or later

DCS-5300
Home Security Internet
Camera with Pan/Tilt



Before You Begin

You must have at least the following:

- Windows XP/2000/ME/98SE
- Ethernet Adapter
- CD-ROM Drive

Check Your Package Contents

These are the items included with your purchase:

If any of the below items are missing, please contact your reseller.



DCS-5300 Internet Camera and 1 remote Controller



Installation CD (containing Drivers, Software, Quick Installation Guide and Manual)



A/V Cable



Category 5 Ethernet Cable



Stand & Mounting bracket



12V AC Power Adapter



Using a power supply with a different voltage rating will damage this product and void the warranty.

System Requirements

- Internet Explorer 5.x or above
- CPU: Pentium III, 800 MHz or above (Required for use with **IP surveillance** software)
- Memory Size: 128 MB (256 MB recommended)
- VGA card resolution: 800x600 or above

Note: If using multiple cameras for viewing/recording, the minimum requirements are a Pentium 4 (2GHz or above) CPU with 512MB memory and a 32MB video card.

1

Hardware Installation

Connect the Ethernet Cable

Connect an Ethernet cable to the Ethernet connector located on the Internet Camera's back panel and attach it to the network.



If you connect this camera directly to a PC, you will need a cross-over Ethernet cable. If you plug the camera into a hub or router, you will be able to use the cable included with your camera.

Attach the External Power Supply

Attach the external power supply to the DC power input connector located on the Internet Camera's back panel (labeled DC 12V) and connect it to an AC power outlet.



Power source is confirmed when the LED Power Indicator on the Internet Camera is illuminated.

Both the red and green LEDs will flash alternately and only the red LED will remain lit. The the green LED will not come on until you have configured your camera.

1

Hardware Installation (continued)

Attach the A/V cable to the A/V out connector if you wish to connect the **DCS-5300** to your TV set.



Attach the red RCA connector to the “video” connector on your TV.



Attach the black RCA cable to the “audio” connector on your TV set.




2


Configuring your camera with IP Installer

Insert the **DCS-5300** CD into the CD-ROM drive.

Click on **IP Installer**

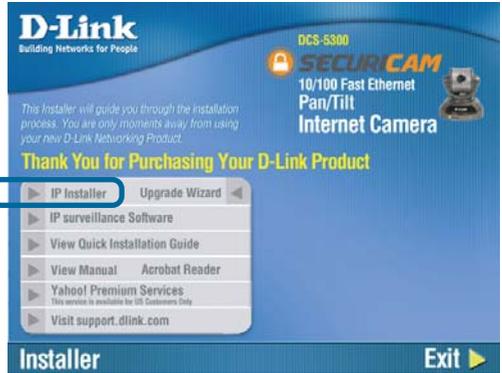


This is the first screen that will appear.

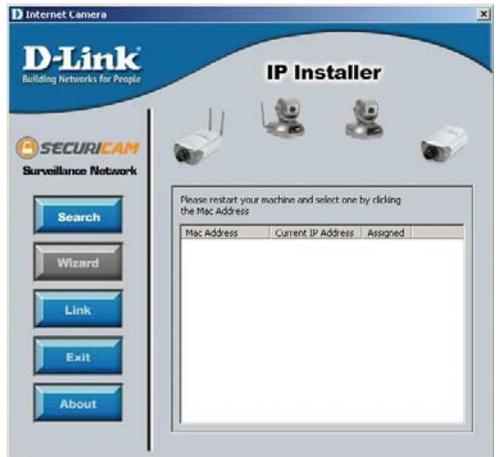

2

Configuring your camera with IP Installer (continued)

If the **IP Installer** does not display any devices, you will need to find a tool small enough to fit into the reset hole and softly press down a switch for 2 cycles (the red and green LEDs will blink continuously and stop twice). Let go when the red LED starts to flash the second time.

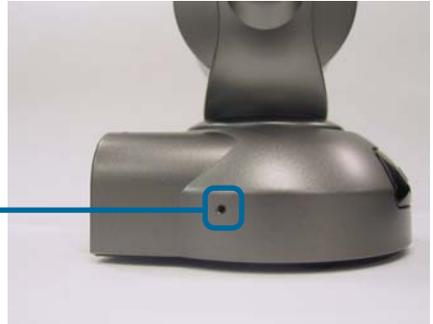


The **IP Installer** will now show the MAC address of the **DCS-5300** and an IP Address (which may or may not be correct depending on what you have your **DCS-5300** connected to.) If you have a DHCP server on your network, there will be a valid IP Address displayed here. After a few seconds, the “assigned” column will display **yes**, indicating that the displayed IP Address is now assigned to the camera.



This page will now show the IP Address assigned to the MAC address of the **DCS-5300**.

Highlight the MAC address

Click on the **Link** button

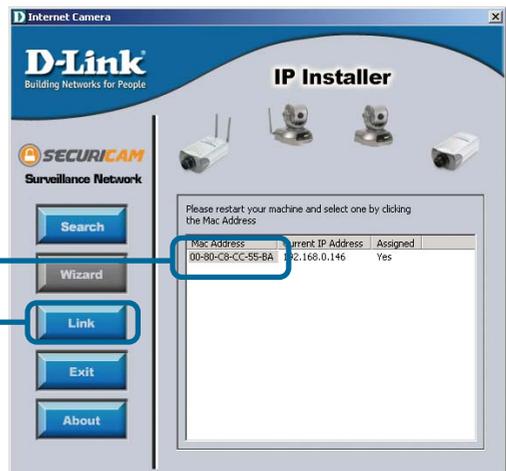

3 Viewing Your Internet Camera

After you click on the **Link** button, **IP Installer** will automatically open your Internet browser to the IP Address of the **DCS-5300**, in this example it is: **http://192.168.0.146**. Your **DCS-5300** may have a different IP Address.



At this point, it is highly recommended that you put in a password for security purposes.

Click on **Configuration**




3

Viewing Your Internet Camera (Continued)

Click on **Tools** and you will be in the **Admin** page, this is where you will be able to put in your password and add additional accounts to the **DCS-5300**

Enter the administrative password. Click **Save** then “X” at top right hand corner of your Browser to close the page.

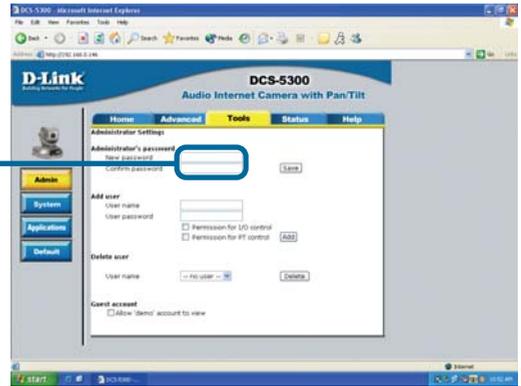

The installation and configuration of the DCS-5300 Internet Camera is now complete.

Technical Support

You can find software updates and user documentation on the D-Link website.

D-Link provides free technical support for customers within the United States and within Canada for the duration of the warranty period on this product.

U.S. and Canadian customers can contact D-Link Technical Support through our website, or by phone.

Tech Support for customers within the United States:

D-Link Technical Support over the Telephone:

(877) 453-5465

24 hours a day, seven days a week.

D-Link Technical Support over the Internet:

<http://support.dlink.com>

[email:support@dlink.com](mailto:support@dlink.com)

Tech Support for customers within Canada:

D-Link Technical Support over the Telephone:

(800) 361-5265

Monday to Friday 7:30am to 12:00am EST

D-Link Technical Support over the Internet:

<http://support.dlink.ca>

[email:support@dlink.ca](mailto:support@dlink.ca)

