



FAST ETHERNET 3-PORT PRINT SERVER

Share multiple printers on
your network

2 parallel and one USB 2.0 port for
connection to compatible printers

Compact size for
flexible placement



The D-Link® DP-300U is a compact print server that connects to your Ethernet or Fast Ethernet network. The DP-300U allows PCs on your network to access and share a USB printer¹ and two parallel printers no matter where they reside on the network.

SUPPORTS MULTIPLE OPERATING SYSTEMS

The DP-300U is equipped with two IEEE1284 parallel ports and one USB 2.0 port for seamless connection to most printers available on the market today. The DP-300U also supports major network Operating Systems and protocols. With its compact size, the DP-300U can easily be placed anywhere!

EASY INSTALLATION

The DP-300U is also easily configurable using a Web browser or Windows-based configuration program. Using Web browsers on a PC connected to the network, configuration is simple and straightforward with the familiar D-Link interface. PS Admin, a Windows-based configuration program can also be used to configure the DP-300U.

The DP-300U print server is the ideal network printing solution for small offices, home offices, schools and other businesses that requires printer sharing.


WHAT THIS PRODUCT DOES

The D-Link 10/100 Fast Ethernet 3-Port Print Server (DP-300U) allows you to share one USB enabled printer and two parallel port enabled printers across a network. With the DP-300U, anyone on the network can readily access a shared printer. Additionally, having a print server helps save energy by eliminating the need for a dedicated computer to be powered on all the time to host a shared printer.

SHARING PRINTERS

With support for USB and parallel port enabled printers, the DP-300U offers seamless connection to most printers on the market today. It is an ideal printing solution for small offices, home offices, schools, and businesses that require the sharing of multiple printers across a network.

YOUR NETWORK SETUP

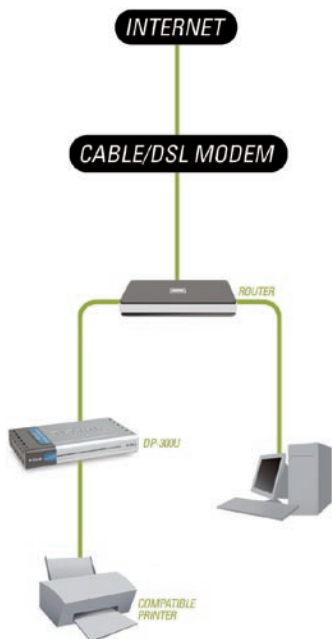

TECHNICAL SPECIFICATIONS

STANDARDS

- + IEEE 1284
- + IEEE 802.2
- + IEEE 802.3
- + IEEE 802.3u
- + USB 2.0/1.1

DEVICE INTERFACE

- + 10/100Mbps Fast Ethernet
- + Two IEEE 1284 Parallel Ports
- + USB 2.0 Port

DATA TRANSFER RATE

10/100Mbps

TRANSPORT PROTOCOL

- + TCP/IP
- + NetBEUI
- + AppleTalk/EtherTalk

TCP/IP PROTOCOLS SUPPORTED

- + BOOTP
- + SNMP
- + Telnet
- + TFTP
- + FTP
- + LPD
- + RARP
- + DHCP

MANAGEMENT

SNMP

MINIMUM SYSTEM REQUIREMENTS

- + Computer with:
 - 300MHz Processor
 - 64MB Memory
 - Ethernet Adapter with TCP/IP Protocol Installed
 - Windows Vista®, Windows® XP SP2, Windows 2000 SP4³, or Mac OS® X (v10.2/v10.3)⁴
- + Printer with USB 2.0/1.1 Port or Parallel Port Connector

PACKAGE CONTENTS

- + Fast Ethernet 3-Port Print Server
- + Power Adapter
- + Quick Installation Guide
- + CD-ROM⁵ with
 - Product Documentation

MIBs

MIB-II (RFC 1213)

DIAGNOSTIC LEDs

- + Power
- + Link/Activity
- + USB
- + LPT1
- + LPT2

POWER INPUT

- + External Power Supply
- + DC 5V, 2.5A

DIMENSIONS

Item (WxDxH): 4.60" x 7.59" x 1.22"

WEIGHT

0.64 lbs (292g)

OPERATING TEMPERATURE

32°F to 122°F (0° to 50°C)

STORAGE TEMPERATURE

-13°F to 131°F (-25° to 55°C)

OPERATING HUMIDITY

5% ~ 95% Maximum (Non-condensing)

WARRANTY

1-Year Limited²

¹ For a list of compatible printers, visit <http://support.dlink.com>.

² 1-Year Limited Warranty available only in the USA and Canada.

³ Computer must adhere to Microsoft's recommended System Requirements. Please contact Microsoft for details.

⁴ Mac OS X 10.4.3 or higher required.

⁵ Latest software and documentation are available at <http://support.dlink.com>.