D-Link®











Wireless N for flexible placement



Day/Night: See up to 15-feet in the dark



Sound/Motion Detection: Trigger recording and send email alerts



Wi-Fi Extender: Expands wireless range



Remote Viewing: View on iPhone®, iPad® or Android® with mydlink™ app

Cloud Camera 1150

Day/Night Network Camera

Product Highlights

All Day/Night Surveillance

Monitor your home or small office 24 hours a day, even in complete darkness

Enhanced Surveillance

Integrated sound and motion-sensing technology provides the peace of mind of round-the-clock surveillance

mydlink-enabled Cloud Access

Easy remote viewing and camera management on your mobile device or through the mydlink website

Day/Night Network Camera

The D-Link Cloud Camera 1150 (DCS-933L) delivers high-quality video for remote viewing on the mobile devices you already own. And with a built-in ICR filter and IR LEDs, you'll also get clear images in complete darkness to provide you with the ideal 24-hour monitoring solution. Its compact design means it can be placed virtually anywhere in your home or small office, and with a built-in microphone you can see and hear more of what matters most.

Audio/Motion Sensing Technology

Integrated sound/motion-sensing technology detects changes within the camera's environment, triggering instant email alerts and even auto-recording. Round the clock notification delivers an additional layer of security and confidence.



Features

- Remotely Monitor Your Home or Office Over the Internet
- IR LED for Night Viewing
- 1.0 Lux for Low-light Environments
- 4x Digital Zoom For Close-up Viewing
- Built-in Microphone¹
- Real-time H.264 and MJPEG Video Compression
- Sound and Motion Detection to Trigger Recording and Send E-mail Alerts
- iPhone[®], iPad[®], or Android[®] App for Remote Viewing²
- mydlink.com Portal for Easy Viewing and Management
- Administrator/User Password Protection
- UPnP® Support for Network Setup & Configuration
- IEEE 802.11n and 802.11g Compliant
- Wi-Fi Protected Setup™ (WPS) Push Button for Easy Network Setup
- Extender Mode for Expanding Wireless Range
- 24/7 Basic Installation Support³
- 1-Year Limited Warranty⁴

Minimum System Requirements

Wired (10/100 Fast Ethernet) or Wireless (802.11g or 802.11n) Network (Wireless N network recommended for optimum wireless performance)

Computer with:

- 1.3GHz Processor
- 128MB Memory
- Windows® 8⁵, Windows® 7⁵, Windows Vista®⁵ and Windows® XP SP3®⁵, or Mac OS X (10.5 and above, Intel Processor)
- Internet Explorer® v6, Mozilla® Firefox®, Google® Chrome, or Safari® v4

For Internet Access:

- · Cable or DSL Modem
- Subscription with an Internet Service Provider (ISP)

Package Contents

- Cloud Camera 1050 (DCS-933L)
- Ethernet Cable
- Power Adapter
- Camera Base and Mounting Kit
- Quick Install Guide

Network Camera with mydlink

Enjoy the freedom and assurance of both local and remote viewing with the free mydlink Lite app for your iPhone®, iPad® or Android® device. Experience the peace of mind of seeing your loved ones and valuables with your own eyes, whenever and wherever you want with D-Link's Cloud Camera 1150.


Make Easy Setup Even Easier – With Zero Configuration

Connecting your D-Link camera with any router is easy – make it even easier with your D-Link Cloud Router. Zero Configuration automatically configures and intelligently syncs your D-Link camera to your mydlink account – it's as easy as connect and view!

Easy Installation, Professional Performance, Anywhere Access



Wi-Fi extender can help boost network signal to reduce dead spots

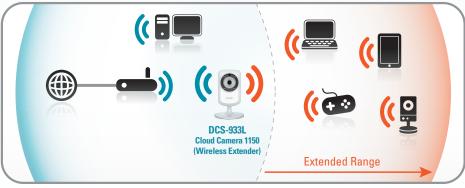

) Existing wireless network) Extended wireless network





| Technical Specifications | | |
|---------------------------------------|---|---|
| Camera | | |
| Hardware Profile | VGA 1/5 inch CMOS Sensor Up to 4x digital zoom IR LED for Night Viewing | Minimum Illumination: 1 Lux at F2.8 Focal Length: 3.15mm lens |
| Field of View | • (H) 45.3°, (V) 34.5°, (D) 54.9° | |
| Image Features | Adjustable image size and quality Time stamp and text overlay | • Flip and mirror |
| Video Compression | • H.264/MJPEG | • JPEG for still images |
| Video Resolution | • Up to 30 frames at 640x480, 320x240,160x120 | |
| Audio Support | • PCM | |
| External Device Interface | • 10/100Base-T | • IEEE 802.11n |
| Network | | |
| Network Protocols | IPV4, ARP, TCP, UDP, ICMP DHCP Client NTP Client (D-Link) DNS Client DDNS Client (D-Link) SMTP Client | FTP ClientHTTP ServerPPPoEUPnP Port ForwardingLLTD |
| Security | • WEP, WPA-PSK, WPA2-PSK | |
| System Management | | |
| System Requirements for Web Interface | Browser: Internet Explorer, Mozilla Firefox, or Google Chrome, Safari | |
| Event Management | Sound/Motion detection Event notification and upload snapshots/video clips via email or FTP | Supports multiple SMTP and FTP servers Multiple event notification Multiple recording methods for easy backup |
| Remote Management | Configuration accessible via web browser Take snapshots/video clips and save to local hard drive or NAS via web browser | |
| Mobile Support | • mydlink™ mobile app for iOS and Android mobile devices | |
| D-ViewCam™ System Requirements | Operating System: Windows XP/Windows Vista / Windows 7 / Windows 8 | |
| D-ViewCam™ Software Functions | Remote management/control of up to 32 cameras Viewing of up to 32 cameras on one screen | Supports all management functions in web interface Scheduled motion triggered or manual recording options |

DCS-933L Cloud Camera 1150

| General Specifications | | | |
|------------------------|--|---------------------|--|
| External Power Adaptor | • Input – 100-240 VAC, 50/60 Hz | • Output – 5VDC, 1A | |
| Max. Power Consumption | • 4.0 watts | | |
| Operating Temperature | • 32° to104°F (0° to 40°C) | | |
| Storage Temperature | • -4° to 158° F (-20° to 70° C) | | |
| Operating Humidity | • 20% to 80% non-condensing | | |
| Storage Humidity | • 5% to 95% non-condensing | | |
| Certifications | • FCC • IC | • C-Tick • CE | |
| Dimensions | • Including the bracket and stand: 2.6" x 2.6" x 5" (27.2mm x 60mm x 96mm) | | |
| Weight | • 0.21lb (95g) | | |
| Warranty | | | |
| Warranty | •1-Year Limited⁴ | | |
| Order Information | | | |
| Part Number | Description | | |
| DCS-933L | Cloud Camera 1150 | | |

¹Use of audio or video equipment for recording the image of a person without their knowledge and consent is prohibited in certain states or jurisdictions. The end-user assumes all liability for compliance with applicable state, local and federal laws. ² The inclusion of a specific product or manufacturer does not imply its endorsement of D-Link or the D-Link product. ³ 24/7 Basic Installation Support is available only in the USA for the first 30 days from date of original purchase. ⁴ 1-Year Limited Warranty available only in the USA and Canada. ⁵ Computer must adhere to Microsoft's recommended System Requirements. ⁶ Requires mydlink-enabled Cloud Router. † TV viewing requires a D-Link MovieNite™ Plus device

All references to speed and range, including the performance chart, are for comparison purposes only. Product specifications, size, and shape are subject to change without notice, and actual product appearance may differ from that depicted on the package. See inside package for warranty details.

For more information

U.S.A. | 17595 Mt. Herrmann Street | Fountain Valley, CA 92708 | 800.326.1688 | dlink.com

©2012 D-Link Corporation/D-Link Systems, Inc. All rights reserved. D-Link, the D-Link logo, mydlink, and the D-Link RoHS logo are trademarks or registered trademarks of D-Link Corporation or its subsidiaries in the United States and/or other countries. Other trademarks or registered trademarks are the property of their respective owners. iPhone and iPad are registered trademarks of Apple Inc. Android is a trademark of Google Inc.

Updated 12/27/12





