

Instantly Add Two USB 2.0 Ports to Your Notebook PC

DUB-C2



- Two Hi-Speed USB 2.0 Ports
- Up to 40x Faster than USB 1.1
- Backward Compatible with USB 1.1/1.0 Devices
- Works with Windows[®] and Mac OS[®] X

QuickMedia USB Solutions Hi-Speed USB 2.0 Notebook Adapter

The D-Link QuickMedia DUB-C2 is a Hi-Speed USB 2.0 2-port Cardbus adapter that upgrades notebook computers to USB 2.0 so you can connect USB 2.0 peripherals. The DUB-C2 is designed to work with mice, keyboards, external hard drives, printers, scanners, digital cameras, and all other USB enabled devices.

The DUB-C2 provides transfer rates of up to 480Mbps¹ for fast transfer of digital content to and from your laptop and USB peripherals. At 40 times faster speeds than USB 1.1, the DUB-C2 enables faster print processing with USB 2.0 printers and faster document scanning with USB 2.0 scanners.

The DUB-C2 is compliant with USB 2.0 standards and is backward compatible with USB 1.0 and USB 1.1 products. This gives you the ability to connect all of your USB 1.x devices to the DUB-C2. Each port detects whether the connected device is USB 1.x or USB 2.0 and automatically runs the device at the appropriate speed.

With built-in support for both Microsoft[®] Windows[®] and Mac OS[®] X, the DUB-C2 is compatible with virtually all popular operating systems for easy integration into your existing environment. Enjoy instant access to your USB peripherals from your Notebook PC using the DUB-C2.

¹ Maximum transfer rate based on USB 2.0 specifications. Actual data throughput will vary.

QuickMedia USB Solutions

Hi-Speed USB 2.0 Notebook Adapter



DUB-C2

SPECIFICATIONS

Standards

- USB Specification Version 2.0
- USB Specification Version 1.1
- USB Specification Version 1.0
- OHCI 1.1 (Open Host Controller Interface)
- EHCI .95 (Enhanced Host Controller Interface)

Operating Systems

- Microsoft Windows XP, 2000 with USB Support
- Mac OS X 10.1 and Higher

Ports

Two downstream USB Type A Ports

Connectivity

Connect up to 127 devices by Daisy Chaining USB Hubs

Supplied Current

500mA per port

Certifications

USB-IF

Card Type

PCMCIA Type II 32-bit Cardbus

Operating Temperature

0°C to 40°C

Storage Temperature

- -20°C to 60°C

Humidity


5% to 95%, non-condensing

Compliances


CE, FCC Class B, VCCI, UL

Warranty

1 Year

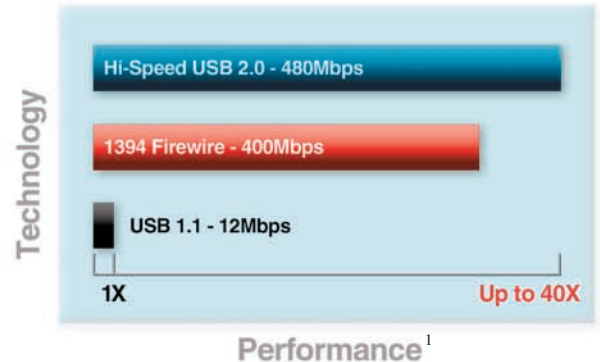

The DUB-C2 performs up to 40 times faster than USB 1.1 by utilizing the 480Mbps¹ throughput speed of Hi-Speed USB 2.0.

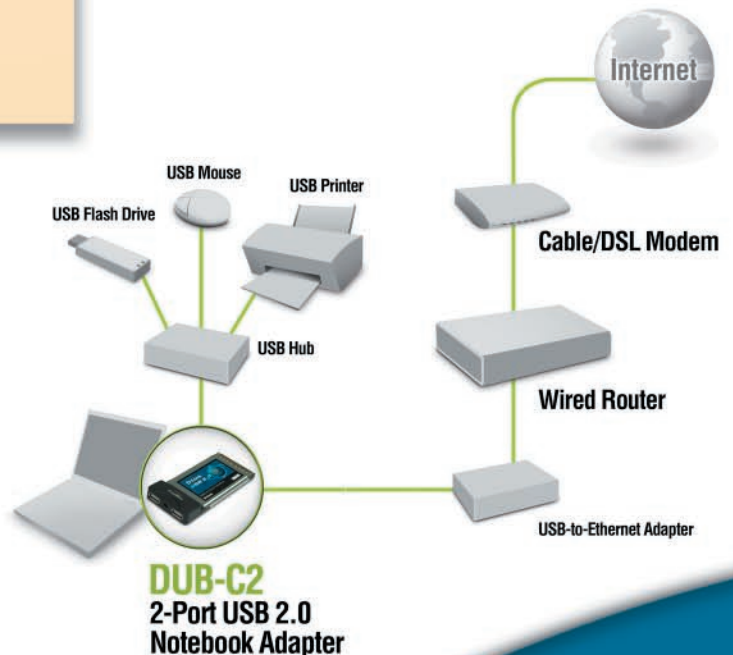

D-Link Systems, Inc. 17595 Mt. Hermann Fountain Valley CA 92708-4160 www.dlink.com
©2003-2005 D-Link Corporation/D-Link Systems, Inc. All rights reserved. D-Link and the D-Link logo are registered trademarks of D-Link Corporation or its subsidiaries in the United States and other countries. Other trademarks are the property of their respective owners. All references to speed are for comparison purposes only. Product specifications, size and shape are subject to change without notice, and actual product appearance may differ from that depicted herein. Visit www.dlink.com for more details.

D-Link[®]
Building Networks for People