

INITIAL SETUP GUIDE

START HERE:

THERE ARE THREE OPERATING SYSTEMS LISTED BELOW TO SHOW INSTRUCTIONS ON HOW TO CONFIGURE YOUR COMPUTER AND BEGIN THE SETUP PROCESS.

OPTION 1: WINDOWS® XP


OPTION 2: WINDOWS VISTA®

OPTION 3: WINDOWS 7

NOTE:

Before you begin, make sure you have administrative permission to modify the computer's network settings.

OPTION 1 - XP

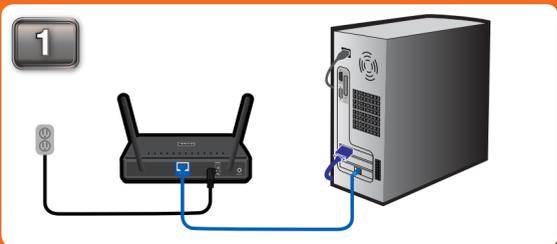


Begin by connecting the power cable to the DAP-1360. Then, connect your ethernet cable to the device's LAN port on the back.




Once your PC is connected to the device, go to the computer's taskbar and click on START, then select Control Panel.



In Control Panel, open "Network Connections".

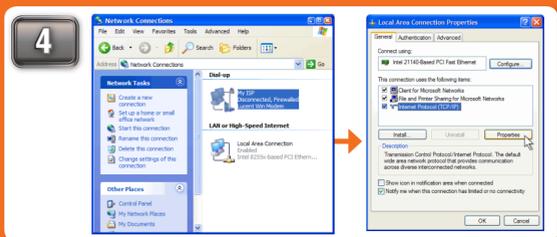

When you have opened the "Network Connections" window, select and right-click the "Local Area Connection" icon and click on properties. After the window has been opened, look for the option "Internet Protocol" (TCP/IP) and click properties.

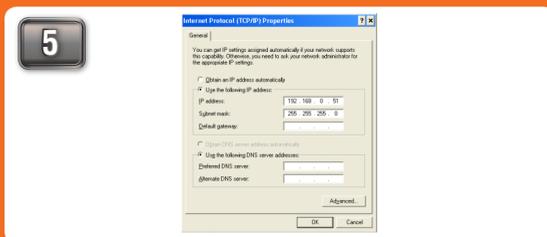

Once you have opened the properties window, select the "Use the following IP address" option. The text boxes below will allow you to type the manual IP address. In the category "IP address" type, "192.168.0.51". Click the "Subnet Mask" text box and the address "255.255.255.0" will appear. You may leave the "Default Gateway," "Preferred DNS Server" and "Alternate DNS Server". Then click "OK".




You have successfully configured your computer to access the device's web-based configuration. Please proceed to the Range Extender guide on the reverse side of this guide.


OPTION 2 - Vista




Connect the power cable to the router. Then connect your ethernet cable to the DAP-1360's LAN port on the back.

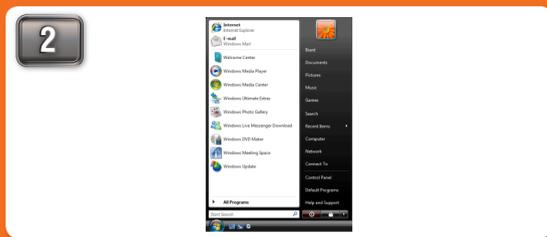


Once connected, go to the computer's taskbar and select START. Then, right-click NETWORK and click PROPERTIES.

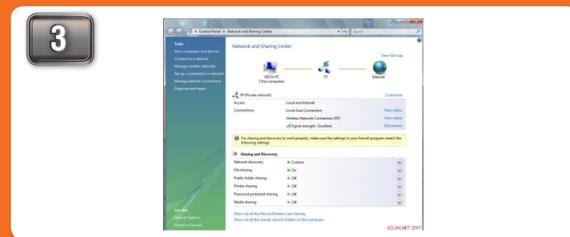

In "Network and Sharing Center," click on "Manage Network Connections" on the left side.

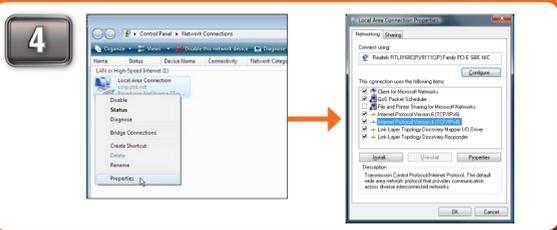

In the "Network Connections" window, right-click the LOCAL AREA CONNECTION icon and click PROPERTIES. When the window opens, select "Internet Protocol Version 4 (TCP/IPv4)" and click PROPERTIES.

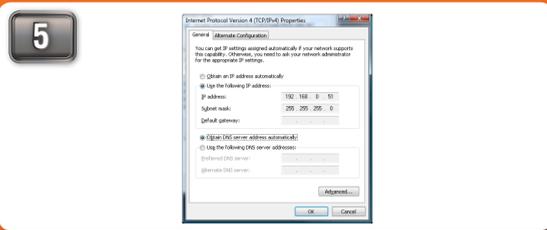

Once you have opened the properties window, select the "Use the following IP address" option. The text boxes below will allow you to type the manual IP address. In the category "IP address" type, "192.168.0.51". Click the "Subnet Mask:" text box and the address "255.255.255.0" will appear. You may leave the "Default Gateway," "Preferred DNS Server" and "Alternate DNS Server". Then click "OK".



You have successfully configured your computer to access the device's web-based configuration. Please proceed to the Range Extender guide on the reverse side of this guide.


OPTION 3 - Windows 7




Connect the power cable to the router. Then connect your ethernet cable to the DAP-1360's LAN port on the back.




Once connected, go to the computer's taskbar and select START. Then, right-click NETWORK and click PROPERTIES.

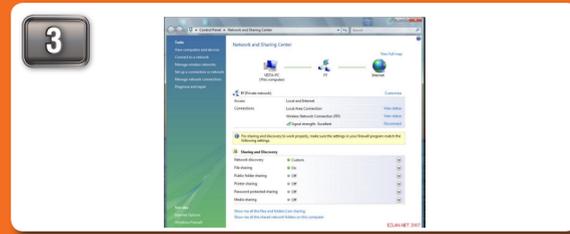

In "Network and Sharing Center," click on "Manage Network Connections" on the left side.

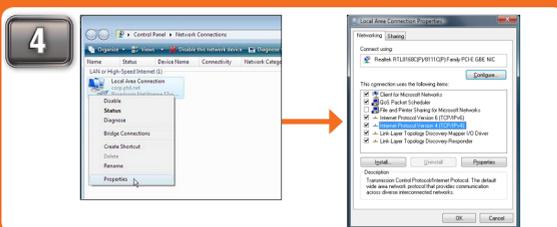

Set up the network and security settings to match your network settings. Refer to the manual on the included CD for detailed information on this setup.

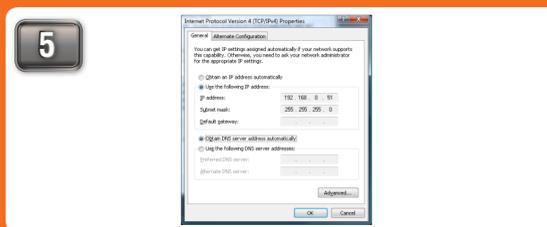

Once you have opened the properties window, select the "Use the following IP address" option. The text boxes below will allow you to type the manual IP address. In the category "IP address" type, "192.168.0.51". Click the "Subnet Mask:" text box and the address "255.255.255.0" will appear. You may leave the "Default Gateway," "Preferred DNS Server" and "Alternate DNS Server". Then click "OK".



You have successfully configured your computer to access the device's web-based configuration. Please proceed to the Range Extender guide on the reverse side of this guide.

RANGE EXTENDER SETUP GUIDE

THERE ARE THREE OPTIONS TO CHOOSE FROM WHEN SETTING UP YOUR NEW DAP-1360 RANGE EXTENDER.

OPTION 1: REPEATER MODE

This mode utilizes the device's primary function to extend the wireless range of your router or access point.

OPTION 2: AP MODE

Your device will operate as your router's access point. It is required that you disable the wireless network on your router before configuring the device. See your router's manual for further information.

OPTION 3: WIRELESS CLIENT MODE

In this mode, your device will function as a wireless adapter to your computer or any other machine that you wish to connect to your network.


NOTE:

For WISP Clients and WISP Repeater Mode see the user manual for instructions on how to setup the device with the two modes.



Follow through the Initial Setup Guide before doing the Range Extender Setup Guide.

OPTION 1 - Repeater Mode

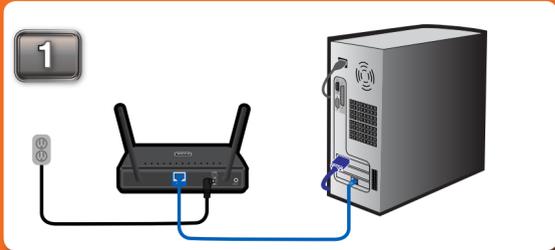

For setup purposes, connect the DAP-1360 to your PC.



Once connected to the device, open your web browser and type in the address bar "http://192.168.0.50" and then press ENTER. You will then be directed to the device's setup page with two options. Click the "Launch Wireless Setup Wizard" to begin the setup.




After selecting "Repeater Mode", you will be asked to give your device a name. Once you have created a name for the device, you will be asked to create a password for each time you log in to the GUI. If you choose not to have a password, you must check the box shown below.



You will be directed to a configuration page where you will be given two options. Select the Auto Mode and click NEXT. Then, select the PBC option and click CONNECT.



Press the PBC button on the side of your router within 120 seconds.

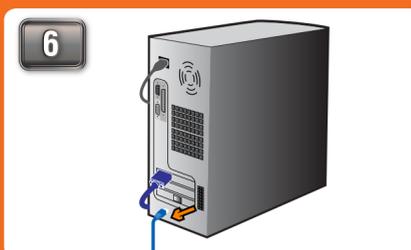

Disconnect the device from your computer and follow the Initial Setup Guide to change your PC's IP address. In the TCP/IPv4 window, select the "Obtain an IP address automatically" option and click OK. Next, click OK for the "Local Area Connections Properties" window and close the "Network and Sharing Center" window.



Once the device has been disconnected from your PC, you may place it in the location you desire. You may connect any PC or other device to your affiliated wireless through the repeater.

OPTION 2 - AP Mode



For setup purposes, connect the DAP-1360 to your PC.



Once connected to the device, open your web browser and type in the address bar "http://192.168.0.50" and then press ENTER. You will then be directed to the device's setup page with two options. Click the "Launch Wireless Setup Wizard" to begin the setup.




After selecting "Access Point Mode", you will be asked to give your device a name. Once you have created a name for the device, you will be asked to create a password for each time you log in to the GUI. If you choose not to have a password, you must check the box shown below.




When you select Next, you will be directed to this screen. Select "Auto" and click NEXT.



This page will display the Wireless Network Name, Wireless Security Mode and the Network Key. Please write down and store the information for future reference.

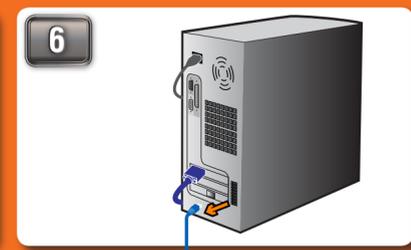

Disconnect the device from your computer and follow the Initial Setup Guide to change your PC's IP address. In the TCP/IPv4 window, select the "Obtain an IP address automatically" option and click OK. Next, click OK for the "Local Area Connections Properties" window and close the "Network and Sharing Center" window.

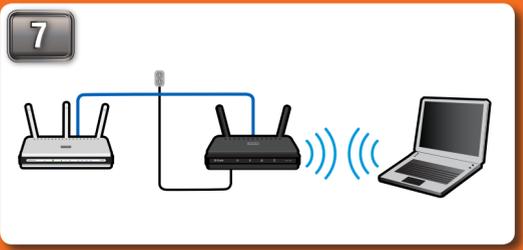

Once the device has been disconnected and your computer's settings have been restored back to the previous settings, connect the Ethernet cable to the device's LAN port on the back of your router. Now you are able to connect your laptop wirelessly to the device.

OPTION 3 - Wireless Client Mode



For setup purposes, connect the DAP-1360 to your PC.




Once connected to the device, open your web browser and type in the address bar "http://192.168.0.50" and then press ENTER. You will then be directed to the device's setup page with two options. Click the "Launch Wireless Setup Wizard" to begin the setup.



After selecting "Wireless Client Mode", you will be asked to give your device a name. Once you have created a name for the device, you will be asked to create a password for each time you log in to the GUI. If you choose not to have a password, you must check the box shown below.



Set up the network and security settings to match your network settings. Refer to the manual on the included CD for detailed information on this setup.

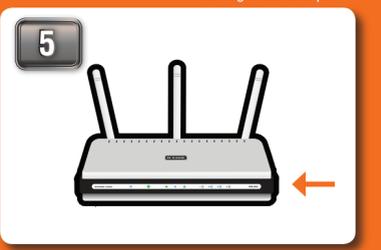

Press the PBC button on the side of your router within 120 seconds.



Disconnect the device from your computer and follow the Initial Setup Guide to change your PC's IP address. In the TCP/IPv4 window, select the "Obtain an IP address automatically" option and click OK. Next, click OK for the "Local Area Connections Properties" window and close the "Network and Sharing Center" window.



After disconnecting the device, reconnect the router to its original position and connections along with your computer. You may now connect your device to any other product, such as an Xbox.