

D-Link®



EXO

AC2000 Wi-Fi Range Extender



Quick Install Guide

DAP-1820

Package Contents



DAP-1820 AC2000 Mesh Wi-Fi Range Extender



Quick Install Card




Quick Install Guide

If any of the above items are missing, please contact your reseller.

Before You Begin

- For setup, you will want your Range Extender to be plugged into an available outlet as close to your Wi-Fi Router as possible. Once setup is complete, you can plug it into an outlet in the area between your Wi-Fi router and where you want improved coverage. See the Troubleshooting section for tips on Wi-Fi Extender placement.
- If your wireless router or access point **does not have a WPS button** ( , ), follow the steps under ***Method Two: D-Link Wi-Fi Setup*** to set up your Range Extender.

Product Overview

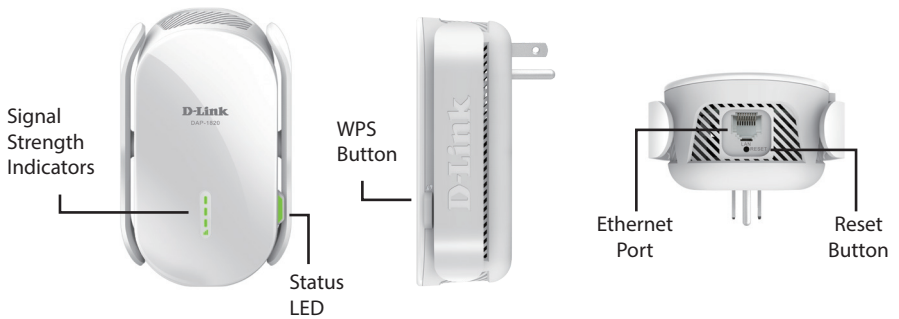

LED	Color	Status	Description
Status LED	Red	Solid	The device is powering on.
	Amber	Blinking	The device is ready but not connected to a router or access point.
	Green	Solid	Indicates that the range extender is securely connected to your wireless router or access point.
		Blinking	The WPS button has been pushed and the device is establishing a connection.

Signal Strength Indicator			
Very Weak (1 x Amber)	Weak (1 x Green)	Good (2 x Green)	Strong (3 x Green)

There are two easy ways to set up your Range Extender.

It is recommended that you use **Method One**. If your router does not have a WPS button (🔄, (WPS)), see **Method Two: D-Link Wi-Fi Setup**, on page 6.

Method One: Quick WPS Setup

- 1 Plug your Range Extender into an available outlet **near your wireless router** and wait until the Status LED is blinking amber (*this may take up to 3 minutes*). You can move it to a more suitable location after it is set up.



- 2 Press the **WPS** (Wi-Fi Protected Setup) button on your wireless router for **3 seconds**. Look for the WPS light (🔄, (WPS)) on your router and **make sure it is blinking**. If it does not blink, see the important note below.

**WI-FI PROTECTED
SETUP**

IMPORTANT

WPS may be disabled on some Routers or Modems. If the WPS Status LED on your Router or Modem does not start blinking when you have pressed the WPS button, try again and hold it a little longer. If it still does not blink, **STOP**, and **configure your Range Extender using Method Two: D-Link Wi-Fi Setup**, on page 6.



- 3 Once confirmed that the WPS light is blinking on your router, within one minute, press the **WPS** button on your Range Extender for **2-3 seconds**. The Status LED should start to blink green.



- 4** When the Status LED turns **solid green** (*may take up to 3 minutes*), this indicates that your Range Extender is securely connected to your wireless router.




Note: If the Status LED on your Range Extender does not turn solid green after running WPS setup, try resetting the unit (*see [Troubleshooting - What if I forgot my Range Extender's Admin password or want to reset my Range Extender?](#)*) and try WPS setup again. If it still does not turn solid green after following all the steps, see **Method Two: D-Link Wi-Fi Setup**, on page 6.

Your setup is complete! You can now unplug and move your Range Extender to a location between your Wireless Router and the area where you want wireless coverage. By default, your **Range Extender will share the same name and password as your Router.**

If after moving your Range Extender, the signal strength indicator is showing one single amber bar or if your Range Extender LED does not turn solid green within 3 minutes, move your Range Extender to a wall outlet closer to your wireless router.

Signal Strength Indicator			
Very Weak (1 x Amber)	Weak (1 x Green)	Good (2 x Green)	Strong (3 x Green)



Method Two: D-Link Wi-Fi Setup

- 1 Search for “**D-Link Wi-Fi**” on the App Store or Google Play and download the D-Link Wi-Fi App to your iPhone, iPad, or Android device.



D-Link Wi-Fi App

- 2 Launch the D-Link Wi-Fi App on your mobile device and follow the on-screen instructions to complete the setup.


When asked to scan the setup QR Code, scan the **QR Code located** on the **Quick Install Card**.



Your setup is complete! You can now unplug and move your Range Extender to a location between your Wireless Router and the area where you want wireless coverage. By default, your **Range Extender will share the same name and password as your Router.**

If after moving your Range Extender, the signal strength indicator is showing one single amber bar or if your Range Extender LED does not turn solid green within 3 minutes, move your Range Extender to a wall outlet closer to your wireless router.

Signal Strength Indicator			
			
Very Weak (1 x Amber)	Weak (1 x Green)	Good (2 x Green)	Strong (3 x Green)



Troubleshooting

Why can't I connect to my wireless router or my wireless connection drops?

1. Verify that your Range Extender is within range of your wireless router. Try plugging it into a location closer to the router and verify the Status LED is solid green.
2. Note that when extending a wireless signal from a router or access point, devices connected to the Range Extender will not get the same speed/throughput as when connected directly to the router.


How do I change the wireless settings on my Range Extender?

1. Open a web browser (e.g., Internet Explorer, Firefox, Chrome, or Safari) and go to **<http://dlinkap.local/>**
2. At the login screen, enter your Admin Password (If WPS Setup was used, password is blank by default - just leave blank) and click **Log in**.
3. Go to **Settings > Extender**.
4. Enter a new **Wi-Fi Network Name (SSID)** and modify the security (Wi-Fi password) settings as needed.
5. Click **Save**.


The screenshot shows the D-Link DAP-1820 web interface. At the top, there's a navigation bar with 'Home', 'Settings', and 'Management'. The main heading is 'Extender' with a sub-note: 'Use this section to configure the wireless settings for your DAP-1820. Please ensure you press Save after any changes made in this section for it to take effect.' Below this, there's a 'Settings >> Extender' breadcrumb and a 'Save' button. The 'Existing Network' section has fields for 'Existing Network' (a dropdown menu showing 'Wi-Fi'), 'Wi-Fi Name (SSID)', and 'Password', with a 'Scan' button next to the SSID field. The 'Smart Connect' section has a 'Status' dropdown menu set to 'Enabled'. The 'Extended Wi-Fi' section has a 'Status' dropdown menu set to 'Enabled', and fields for 'Wi-Fi Name (SSID)' (containing 'dlink-1820F'), 'Password' (containing 'qtp06098'), and 'Schedule' (a dropdown menu set to 'Always Enable').

Note: If you have changed the Wi-Fi Network name or Wi-Fi Password, the device you are currently using to connect to your Range Extender will drop. You will need to go to your Wi-Fi Settings and connect to your Range Extender using the new network name and password.

Where should I place my Range Extender for best performance?

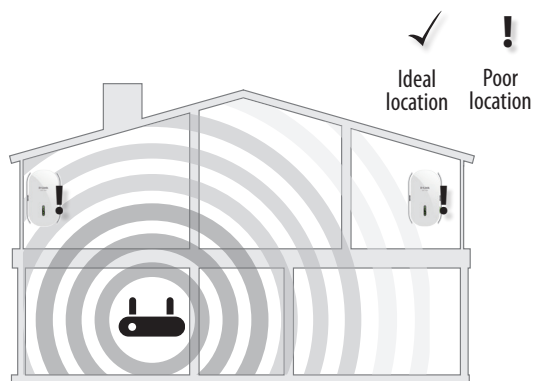

A Range Extender only works as well as the signal it is extending. Therefore, proper placement of your Range Extender is important in achieving desired results.

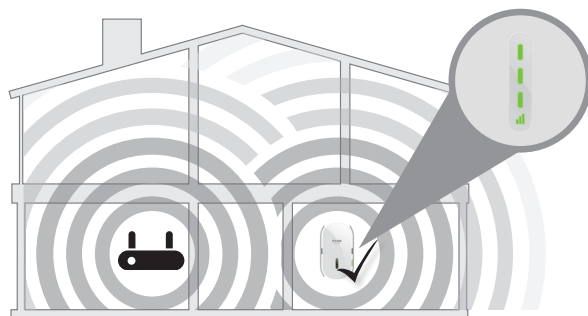

For best performance, place your Range Extender in between your router and your dead zone, making sure it is placed in a location where the Wi-Fi signal is still strong. Use the Smart Signal Indicator to help find a location with a strong signal. The more bars lit on the signal indicator, the stronger the Wi-Fi signal is.

What if I forgot my Range Extender's Admin password or want to reset my Range Extender?

1. If you forgot your Admin password or want to reset your Range Extender back to the factory default settings, press and hold the reset button on the bottom of the extender using a paper clip and release after a minimum of 10 seconds. The Status light will turn red.

Note: This process will erase all your settings.

2. Setup your Range Extender using your preferred method.



What if WPS setup is not working?

WPS may be disabled on some Routers or Modems. If the WPS Status LED on your Router or Modem does not start blinking when you have pressed the WPS button, try again and hold it a little longer. If it still does not blink, **STOP**, and **configure your Range Extender using Method Two: D-Link WiFi Setup**, on page 6.

What is Mesh Smart Roaming?

With Mesh Smart Roaming, your Wi-Fi device (e.g. SmartPhone, Tablet) will automatically roam to the strongest Wi-Fi signal, eliminating the need to switch between your Router's and Range Extender's Wi-Fi signal as you move around your home.

Mesh Smart Roaming Requirements:

1. The Wi-Fi device (e.g. SmartPhone, Tablet) **must support the 802.11k/v standard**.
2. The Wireless Name (SSID) & Wireless Password **must be the same** on both the Mesh Wi-Fi Range Extender and your Wireless Router.

Why don't I see a different network name (SSID) for each wireless band?

By default, SmartConnect is enabled on this Range Extender. SmartConnect will automatically steer your device to the optimal wireless band (2.4GHz or 5GHz) according to current network traffic. When enabled, you will only see one wireless network name (SSID) from your Range Extender.

GPL Code Statement

This D-Link product includes software code developed by third parties, including software code subject to the GNU General Public License ("[GPL](#)") or GNU Lesser General Public License ("[LGPL](#)"). As applicable, the terms of the GPL and LGPL, and information on obtaining access to the GPL code and LGPL code used in this product, are available to view the full GPL Code Statement at:

<https://tsd.dlink.com.tw/GPL>

The GPL code and LGPL code used in this product is distributed WITHOUT ANY WARRANTY and is subject to the copyrights of one or more authors. For details, see the GPL code and the LGPL code for this product and the terms of the GPL and LGPL.

Written Offer for GPL and LGPL Source Code

Where such specific license terms entitle you to the source code of such software, D-Link will provide upon written request via email and/or traditional paper mail the applicable GPL and LGPL source code files via CD-ROM for a nominal cost to cover shipping and media charges as allowed under the GPL and LGPL.

Please direct all inquiries to:

Email:

GPLCODE@dlink.com

Snail Mail:

Attn: GPLSOURCE REQUEST
D-Link Systems, Inc.
14420 Myford Road, Suite 100
Irvine, CA 92606

Technical Support

This guide is for first time configuration. Please refer to the user manual to learn more.
U.S. customers can contact D-Link Technical Support through our website.

USA



<http://support.dlink.com/>



877-453-5465

D-Link[®]

Version 1.30(US)_90x130

July 07, 2021

610000011510

©2021 D-Link. All rights reserved. D-Link and the D-Link logo are trademarks or registered trademarks of D-Link Corporation or its subsidiaries. All other third-party marks mentioned herein may be trademarks of their respective owners. This publication may not be reproduced, in whole or in part, without prior express written permission from D-Link Systems, Inc.