

D-Link Quick Installation Guide

This product can be set up using any current Web browser, i.e., Internet Explorer 6.0 or Netscape Navigator 7.0



DCS-1000W
D-Link 2.4Ghz Wireless
Internet Camera

Before You Begin

You must have at least the following:

- Web Browser
- Wired Hub/Switch/Router OR Wireless 802.11b Router
- CD-ROM Drive

Check Your Package Contents

These are the items included with your purchase:

If any of the below items are missing, please contact your reseller.



- One Internet Camera with 2 External Wireless Antennas



- One Installation CD-ROM (containing Drivers, Installation Guide, Software, and Manual)



- Mounting Kit



- One Category 5 Ethernet Cable



- One AC Power Adapter

System Requirements

- Web Browser (Java Enabled recommended)
- CPU: Pentium II, 266 MHz or above
- Memory Size: 32 MB (64 MB recommended)
- VGA card resolution: 800x600 or above

1 Hardware Installation

Install Antennas

Locate the antenna connectors on the rear panel of your DCS-1000W. Attach the 2 external antennas included with the DCS-1000W into the antenna connectors.



Configure Network Communication

Locate the slide switch located on the rear panel of your DCS-1000W. Position the slide switch to either the LAN, LAN+WLAN, or WLAN position depending on the type of network configuration that you are planning to use with your camera. Position the switch on LAN+WLAN if you wish to connect to both your wired and wireless network.



Connect the Ethernet Cable

Connect an Ethernet cable to the network cable connector located on the DCS-1000W's rear panel and attach it to the network.

Note: We suggest using the Ethernet port to configure the DCS-1000W, then installing the camera in its preferred location. Doing so will allow easy installation and proper configuration.



Attach the External Power Supply

Attach the external power supply to the DC power input connector located on the rear panel of your camera and connect it to your local power supply. *Note: Power source is confirmed when the blue LED Power Indicator on the Internet Camera is illuminated. Network connection is indicated by an orange LED.*



2 Running the Setup Wizard


You are now ready to run the Setup Wizard, which will guide you quickly through the installation process.

Insert the **D-Link DCS-1000W** Driver CD into your CD-ROM drive.

Click **Install Wizard**




Click **Next**

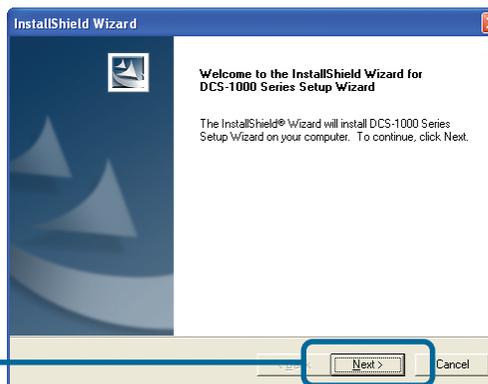


Click **Yes**



2 Running the Setup Wizard (continued)

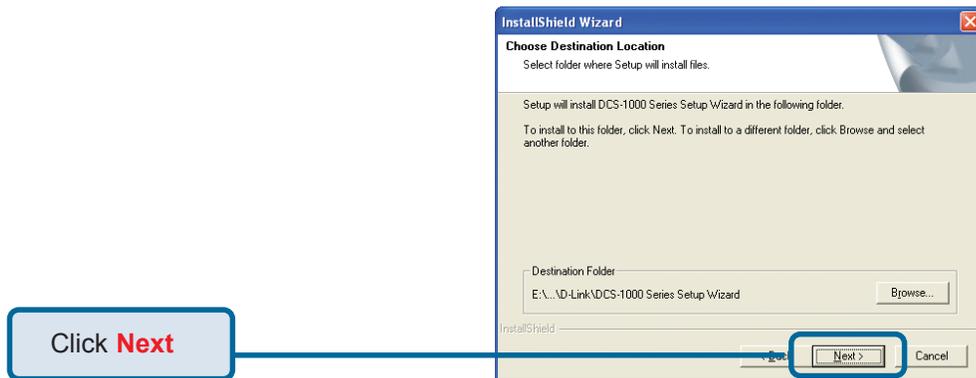


To run the Setup Wizard, click on **Start->Programs->DCS-1000 Series Setup Wizard**.

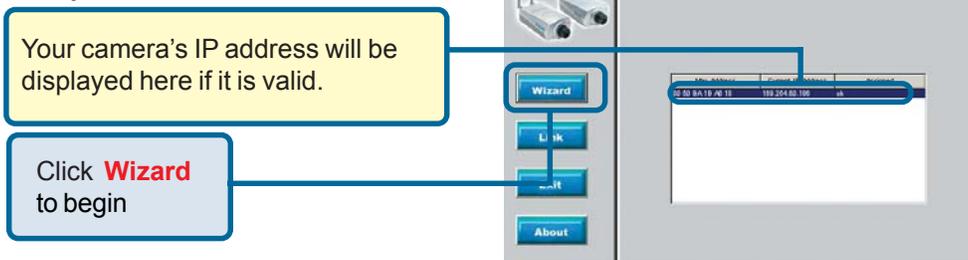

2 Running the Setup Wizard (continued)


This screen appears if the default IP Address of the camera (192.168.0.20) does not correspond with your local area network settings. You must assign an IP address for your camera that corresponds to your network's IP addressing scheme.

Click **Yes**

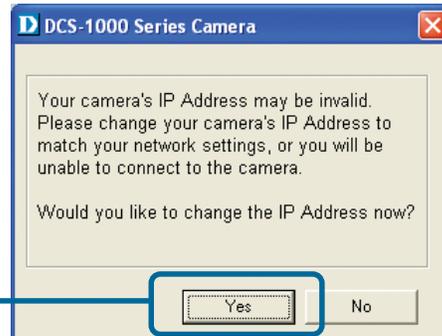


By default, the **Admin ID** and **Password** are blank. If you are running this Setup Wizard for the first time, leave both Admin ID and Password fields blank.

Click **OK**

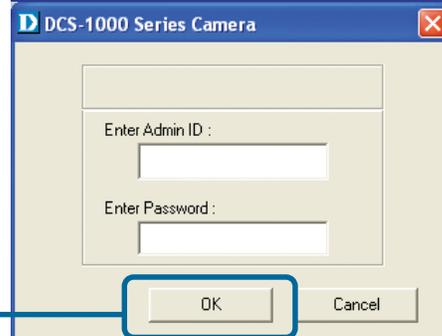

The **IP Address**, **Subnet Mask**, and **Gateway** of your camera must correspond with your network settings for you to access the camera. If you are unsure of what these settings should be, please check with your network administrator.

Click **OK**

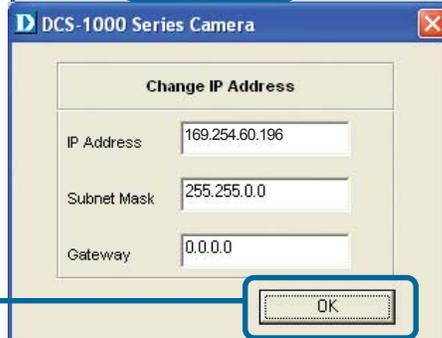

You must change the **Admin ID** and **Password** immediately to protect your camera against unauthorized access. To change the Admin ID and Password, select both **Change** boxes and enter in a new Admin ID and Password.

Click **Next**



2 Running the Setup Wizard (continued)

Input the correct settings for your camera into the **IP Address** and **Subnet Mask** fields. If you are using a gateway/router with your camera, enter the **Default Gateway IP Address**. Remember that these settings must correspond with your network settings.

Click **Next**

The **Connection Mode** depends on how your camera is connected to your network. Click **Infrastructure** for use with a router or **Adhoc** for peer-to-peer. The **Network Name**, **Wireless Channel**, and **Encryption Keys** MUST correspond with your wireless network settings.

Click **Next**

If you need to make any changes, click **Back** to modify your camera settings. Otherwise, click **Restart** to save your settings.

Click **Restart**

Your setup is now complete! When the main Setup Wizard screen appears after clicking **Restart**, you are ready to view your camera's images. Click **Link** to automatically launch your web browser and view your images.

Click **Link**

D-Link
Building Networks For People

Setup Wizard

Set IP Address

IP Address : 169.254.60.196
Subnet Mask : 255.255.0.0
Default Gateway : 0.0.0.0

Back Next Exit

D-Link
Building Networks For People

Setup Wizard

Wireless Interface

Connection Mode : Infrastructure
 802.11 Adhoc
 Adhoc

Network Name (ESS-ID) : default
Wireless Channel : 6
Old Encryption WEP Key : ASCII HEX
 Change Encryption WEP Key
New Encryption WEP Key :
Restore From WEP Key :

Back Next Exit

D-Link
Building Networks For People

Setup Wizard

Admin ID : dlink
Password : dlink
IP Address : 169.254.60.196
Subnet : 255.255.0.0
SSID : JQC764b
Channel : 6
WEP Key : 1111111111111111

The Setup Wizard has completed. Click on **Back** to modify your settings. Click **Restart** to save your current settings and reboot the DCS-1000 Series Camera.

Back Restart

D-Link
Building Networks For People

Setup Wizard

Wizard
Link
Exit
About

No.	Mac Address	Current IP Address	Assigned
01	8A:19:4E:13	169.254.60.196	OK

3 Viewing the Streaming Video

You may access your camera's images at any time simply by using your favorite Web browser. Type "http://**address**" in the address bar of your Web browser where **address** is the IP address that you assigned to your camera from the previous section. Press **Enter**. Note: The Home screen of your camera can also be accessed from the Setup Wizard using the **Link** button.

Click **Active X** or **Java** to view the video images.



To adjust the focus on the lens, turn the lens slowly clockwise or counter-clockwise until a desired image appears on your web browser. Avoid overturning the lens as this will either displace or damage the lens.



4 Tips

- If you are installing several cameras, it is recommended to use one computer to configure all of them before you install them in your planned locations. To avoid IP address conflict, use 192.168.0.20 for the LAST camera that you plan on installing.
- Make sure that you have the latest version of Java installed on your computer to ensure proper operation when viewing the video in Java mode. Java can be downloaded for free from Sun's web site. (<http://www.sun.com/download/>)
- When using the camera in 802.11b mode, make sure that the camera is located within operating distance from the access point. The number of walls and other objects will hinder the wireless effective operating distance.
- Please refer to the Manual located on the CD-ROM for additional information regarding all features and instructions related to the Internet Camera.

Technical Support

You can find software updates and user documentation on the D-Link website.

D-Link provides free technical support for customers within the United States and within Canada for the duration of the warranty period on this product.

U.S. and Canadian customers can contact D-Link technical support through our website, or by phone.

Tech Support for customers within the United States:

D-Link Technical Support over the Telephone:

(877) 453-5465

24 hours a day, seven days a week.

D-Link Technical Support over the Internet:

<http://support.dlink.com>

[email:support@dlink.com](mailto:support@dlink.com)

Tech Support for customers within Canada:

D-Link Technical Support over the Telephone:

(800) 361-5265

Monday to Friday 8:30am to 9:00pm EST

D-Link Technical Support over the Internet:

<http://support.dlink.ca>

[email:support@dlink.ca](mailto:support@dlink.ca)

