

QUICK INSTALL GUIDE

DIR-450

VERSION 1.0



D-Link®

WIRELESS

Package Contents

- D-Link DIR-450 Mobile Router
- Power Adapter
- Ethernet Cable
- Manual and Warranty on CD

Note: Using a power supply with a different voltage rating than the one included with the DIR-450 will cause damage and void the warranty for this product.

If any of the above items are missing, please contact your reseller.

System Requirements

- A compatible 32-bit PCMCIA (EVDO) card with service*
- Computers with Windows®, Macintosh®, or Linux-based operating systems with an installed Ethernet adapter
- Internet Explorer Version 6.0 or Netscape Navigator™ Version 6.0 and above (for configuration)

** Subject to services and service terms available from your carrier.*

Connect to your Network

Note: Ensure that power to your DIR-450 Mobile Router is not connected before performing the installation steps below.

32-bit PCMCIA (EVDO) Card Connection


1. Attach the antenna.
 - a. Remove the antenna from its plastic wrapper.
 - b. Screw the antenna in a clockwise direction to the back panel of the unit.
 - c. Once secured, position the antenna upward at its connecting joint. This will ensure optimal reception.
2. Insert your wireless 32-bit PCMCIA (EVDO) card into the Internet Card Slot on the back of the router.
3. Insert the Ethernet cable into LAN Port 1 on the back panel of the DIR-450 Mobile Router, and an available Ethernet port on the network adapter in the computer you will use to configure the unit.

Note: The DIR-450 Mobile Router LAN Ports are “Auto-MDI/MDIX.” This provides either patch or crossover Ethernet cable LAN Port access.

4. Connect the power adapter to the receptor on the back panel of your DIR-450 Mobile Router. Then plug the other end of the power adapter into a wall outlet or power strip.
 - a. The Power LED will turn ON to indicate power has been applied.
 - b. Other LEDs will flash ON and OFF as the DIR-450 Mobile Router performs initialization and Internet connection processes. This will take a few minutes.
 - c. When complete, the following LEDs will illuminate blue: Power, Status, Internet, WLAN, and LAN Port 1 (or your specific LAN Port connection).


Using the Setup Wizard

Open your web browser and type `http://192.168.0.1` into the URL address box. Press **Enter**.

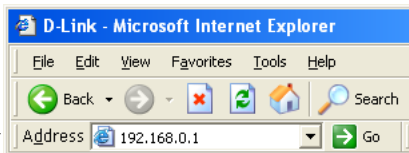


The logon pop-up screen will appear:

Type **admin** for the username and leave the password blank.




Once you have logged in, the Setup screen will appear:

Click **Setup Wizard**

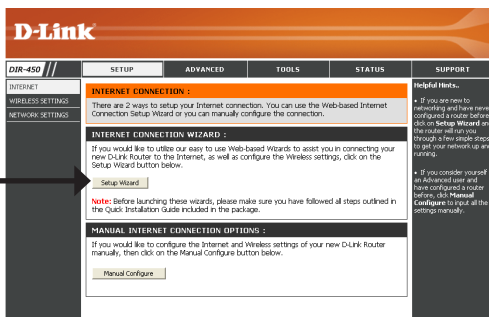

Click **Launch Internet Connection Setup Wizard** to begin.

Click **Launch Internet Connection Setup Wizard**

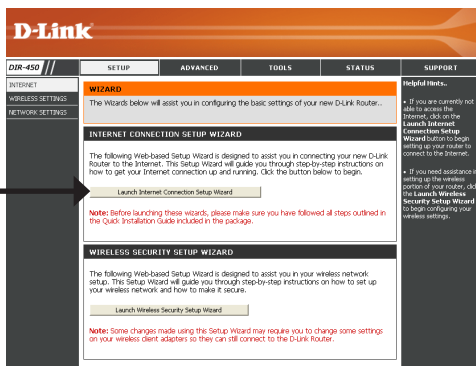

Click **Next** to continue.

Click **Next**




Create a new password and then click **Next** to continue.

Click **Next**



Select your time zone from the drop-down menu and then click **Next** to continue.

Click **Next**

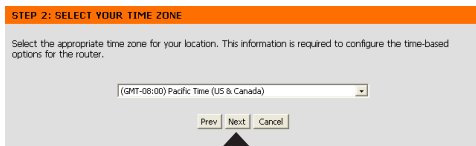

Select the ISP Card from the drop-down list and then click **Username / Password Connection (WWAN)**. Click **Next** to continue.

STEP 3: CONFIGURE YOUR INTERNET CONNECTION

Your Internet Connection could not be detected, please select your Internet Service Provider (ISP) from the list below. If your ISP is not listed, select the "Not Listed or Don't Know" option to manually configure your connection.

ISP - Card List
Far Eastern Telecom - Option Wireless GT Fusion

If your Internet Service Provider was not listed or you don't know who it is, please select the Internet connection type below:

- ☐ **Static IP Address Connection**
Choose this option if your Internet Setup Provider provided you with IP Address information that has to be manually configured.
- ☐ **DHCP Connection (Dynamic IP Address)**
Choose this if your Internet connection automatically provides you with an IP Address. Most Cable Modems use this type of connection.
- ☐ **Username / Password Connection (PPPoE)**
Choose this option if your Internet connection requires a username and password to get online. Most DSL modems use this connection type of connection.
- ☒ **Username / Password Connection (WWAN)**
Choose this option if your Internet connection requires a username and password to get online. Most DSL modems use this connection type of connection.

Prev Next Cancel

Click **Next**

Enter your WWAN user name, password, and server information. If you do not have this information, please contact your ISP.

SET USERNAME AND PASSWORD CONNECTION (WWAN)

To set up this connection you will need to have a Username and Password from your Internet Service Provider. You also need WWAN Server Name and Dial Number. If you do not have this information, please contact your ISP.

WWAN User Name :

WWAN Password :

WWAN Verify Password :

WWAN Server Name :

WWAN Dial Number : 8777

WWAN APN :

Prev Next Cancel

Click **Next**

Click Connect to save your settings. Once the router is finished rebooting, click **Continue**. Please allow 1-2 minutes to connect.

SETUP COMPLETE

The Setup Wizard has completed. Click the Connect button to save your settings and reboot the router.

Prev Connect Cancel

Click **Connect**

Notes

Technical Support

D-Link's website contains the latest user documentation and software updates for D-Link products.

U.S. and Canadian customers can contact D-Link Technical Support through our website or by phone.

United States

Telephone

(888) 843-6100

Monday through Friday 8:00am - 5:00pm (PST)

World Wide Web

<http://support.dlink.com>

Canada

Telephone

(800) 361-5265

Monday through Friday, 7:30am to 9:00pm (EST)

World Wide Web

<http://support.dlink.ca>



Version 1.0
August 18, 2006

Copyright ©2006 D-Link Corporation/D-Link Systems, Inc. All rights reserved. D-Link and the D-Link logo are registered trademarks of D-Link Corporation or its subsidiaries in the United States and other countries. Other trademarks are the property of their respective owners. Maximum wireless signal rate derived from IEEE Standard 802.11g specifications. Actual data throughput will vary. Network conditions and environmental factors, including volume of network traffic, building materials and construction, and network overhead, lower actual data throughput rate. Environmental factors will adversely affect wireless signal range. Product specifications, size and shape are subject to change without notice, and actual product appearance may differ from that depicted on the packaging. Visit www.dlink.com for more details.