



## 5-PORT 10/100 DESKTOP SWITCH

Add more devices and computers to the network

No software or configuration required - just connect it to your network and you are up and running

Delivers up to 200Mbps throughput per port in full-duplex mode



### **GREAT PERFORMANCE AND VALUE**

Expand your wired home network with the D-Link® 5-Port 10/100 Desktop Switch (DES-1105). This Desktop Switch fits virtually anywhere because of its compact size. Its power connector and ports are conveniently located in the rear to avoid messy cables on the desk. This Desktop Switch can also be mounted on a wall or underneath a desk with the included wall mounting kit.

### **ADD MULTIPLE COMPUTERS AND OTHER NETWORK DEVICES**

By connecting the DES-1105 to your router, you can add up to four more computers to your home network. A game console, printer, print server, Network-Attached Storage (NAS) or network camera can also be added.

### **SMOOTH TRAFFIC MANAGEMENT**

The DES-1105 receives and forwards traffic seamlessly with its non-blocking wire-speed architecture. Every port simultaneously supports up to 200Mbps of bandwidth, totaling 1Gbps of switching capacity. It minimizes bottlenecks, allowing your network to run smoothly even during the heaviest volume of traffic.

### **EASY TO INSTALL AND USE**

This Desktop Switch requires no configuration and installation is simple. Whether you are connecting the DES-1105 to another switch or a computer, there is never a need for crossover cables with Auto-MDI/MDI-X support. Additionally, the Desktop Switch auto-senses if the network device it is connected to is running at 10Mbps or 100Mbps and adjusts accordingly. Equipped with a comprehensive LED display, you can monitor the status and activity of every port at a glance.

With outstanding performance, quality, and features packed in a compact sized device, the D-Link 5-Port 10/100 Desktop Switch (DES-1105) is a great selection for expanding your home network.


### WHAT THIS PRODUCT DOES

The DES-1105 is a 5-port 10/100Mbps Ethernet switch. By connecting the DES-1105 to your router, you can add up to four computers or other Ethernet-based devices to your home network. Add a print server, Network-Attached Storage (NAS) or network camera and experience the benefits of networking.

### HASSLE-FREE SETUP

The DES-1105 requires no configuration, which makes setup simple and hassle-free. Connect multiple computers and share files, music, and video across your home or small office network, or create a multiplayer gaming environment. If you need help, visit D-Link's award-winning Customer Support Web Site for answers to frequently asked questions, product downloads, and easy access to D-Link's friendly customer support.

### YOUR NETWORK SETUP

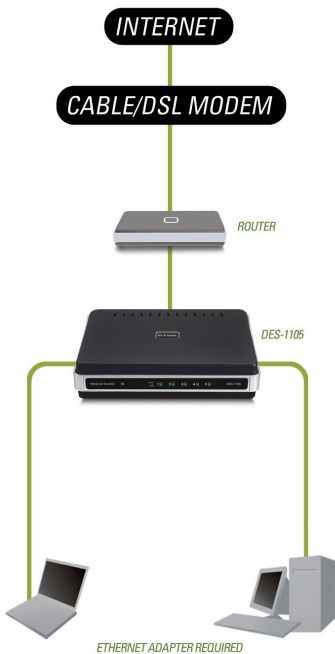

### TECHNICAL SPECIFICATIONS

#### NETWORK PROTOCOL AND STANDARDS

- + IEEE 802.3 Ethernet
- + IEEE 802.3u Fast Ethernet
- + IEEE 802.3x Flow Control

#### INTERFACE OPTIONS

RJ-45: 10BASE-T, 100BASE-TX Universal UTP Cable Recognition for Straight-through or Crossover cables

#### FEATURES

- + Number of Ports: Five 10/100BASE-TX
- + MAC Address Table: 2k
- + Switch Fabric: 1.0Gbps
- + Packet Buffer Memory: 64KB Buffer
- + Transmission Method: Store-and-forward

#### CERTIFICATIONS

Class B

#### LED

- + Per unit: Power
- + Per port: Link/Activity 10/100Mbps

#### POWER CONSUMPTION

2.5 Watts Max

#### MINIMUM SYSTEM REQUIREMENTS

- + Devices Supporting 802.3 Ethernet or 802.3u Fast Ethernet
- + CAT5 Ethernet Cable
- + Network Interface Card for Each Computer
  - CD-ROM Drive to View Product Documentation

#### PACKAGE CONTENTS

- + 5-Port 10/100 Desktop Switch
- + Power Adapter
- + Wall Mount Kit
- + Rubber Feet
- + CD-ROM<sup>2</sup> with
  - Product Documentation

#### POWER SUPPLY

DC 5V/2A

#### OPERATING TEMPERATURE

32°F to 122°F (0°C ~ 40°C)

#### OPERATING HUMIDITY

10% ~ 90% (Non-condensing)

#### DIMENSIONS

+ Item (W x D x H): 5.8" x 4.5" x 1.2"  
(147mm x 114mm x 30mm)

+ Packaging (W x D x H): 10.8" x 2.7" x 8.2"  
(274mm x 68mm x 208mm)

#### WEIGHT

- + Item: 0.5 lbs (0.2 kg)
- + Packaging: 1.5 lbs (0.7 kg)

#### WARRANTY

Limited Lifetime<sup>1</sup>

<sup>1</sup> Limited Lifetime Warranty available only in the USA and Canada if purchased on or after June 1, 2010. Visit [www.dlink.com](http://www.dlink.com) for warranty details.

<sup>2</sup> Latest software and documentation are available at <http://support.dlink.com>.

All references to speed are for comparison purposes only. Product specifications, size and shape are subject to change without notice, and actual product appearance may differ from that depicted herein.

©2005-2010 D-Link Corporation/D-Link Systems, Inc. All rights reserved. D-Link and the D-Link logo are registered trademarks of D-Link Corporation or its subsidiaries in the United States and/or other countries. Other trademarks or registered trademarks are the property of their respective owners.