



UTILITY USER MANUAL

DPH-128MS

VERSION 1.0

D-Link® DPH-128MS Utility

The DPH-128MS Utility helps to facilitate the quick and easy management of Advanced settings for your D-Link® DPH-128MS Multiline IP Phone(s). You can use it to:

- Upload MP3 Hold/Ringtone music.
- Change banner screens.
- Modify the administrator's name and/or password.
- Customize the list of Internet radio stations.
- Enable/Disable each feature for a single or all DPH-128MS IP Phones selected.

Note: For VPN Topologies, D-Link recommends that the DPH-128MS Utility be executed from a computer that is physically located in the same LAN as the DPH-128MS Multiline IP Phone(s).

MP3 Hold/Ring


Hold/Ring: Use the radial button to select which feature the uploaded mp3 file will be used for.

File: Browse and select a new mp3 file that you want to upload.

Refresh: List all DPH-128MS IP Phones in your local network environment.

Upload: Upload the mp3 file to the selected device in the list.

Upload All: Upload the mp3 file to all devices in the list.

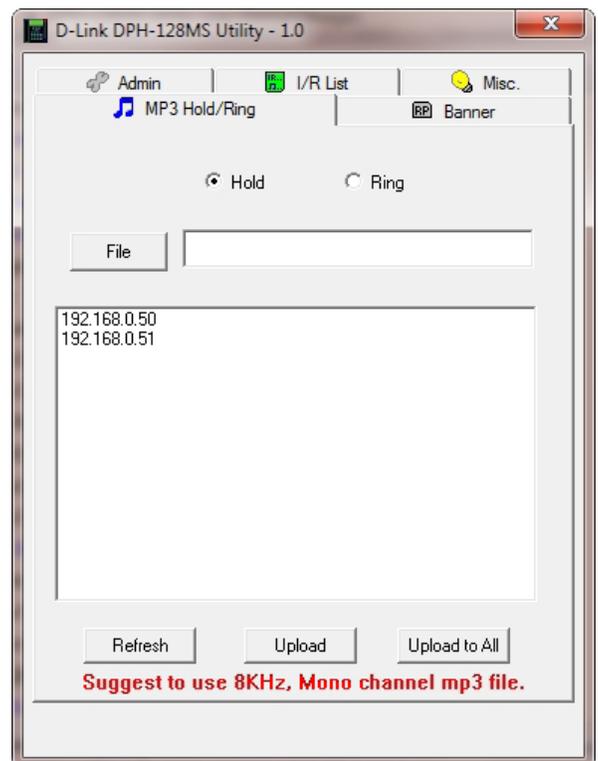

Note: The recommended MP3 file format is 8KHz sample and Mono Channel.

Banner


Banner: Select the numbered position for uploading the bitmap file. There are a total of six banner screens.

File: Browse and select a new bitmap file that you want to upload.

Refresh: List all DPH-128MS IP Phones in your local network environment.

Upload: Upload the bitmap file to the selected device in the list.

Upload All: Upload the bitmap file to all devices in the list.

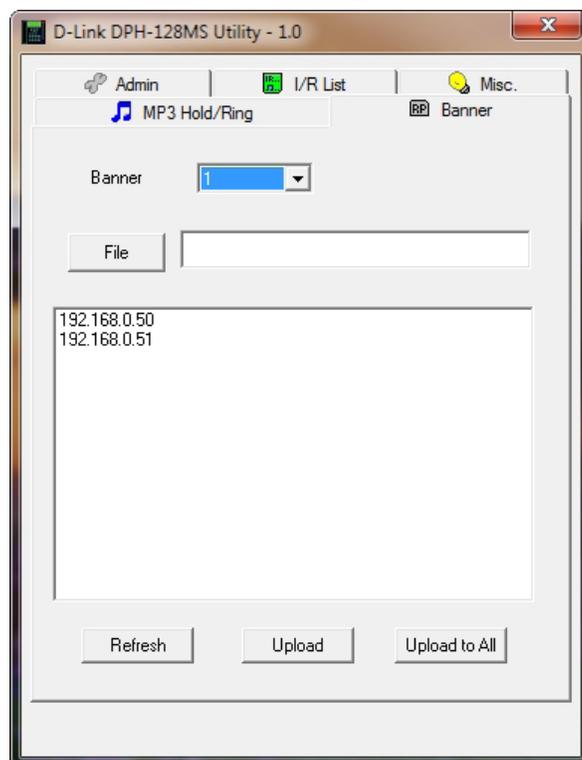

Note: The DPH-128MS only supports monochrome, uncompressed bitmap files. Its width and height should be limited to 128 by 64 pixels.

Admin

Admin Name

Old: The current name of the “administrative account” on the device.

New: The new name you want to set. (This field only works when the “Change” button is checked.)

Password

Old: The current “administrative account” password of the device.


New: The new password you want to set.

Confirm: Re-type the new password for confirmation purposes.

Refresh: List all DPH-128MS IP Phones in your local network environment.

Upgrade: Upgrade the administrator’s name and password for a selected device.

Upgrade All: Upgrade the administrator’s name and password for all devices in the list.

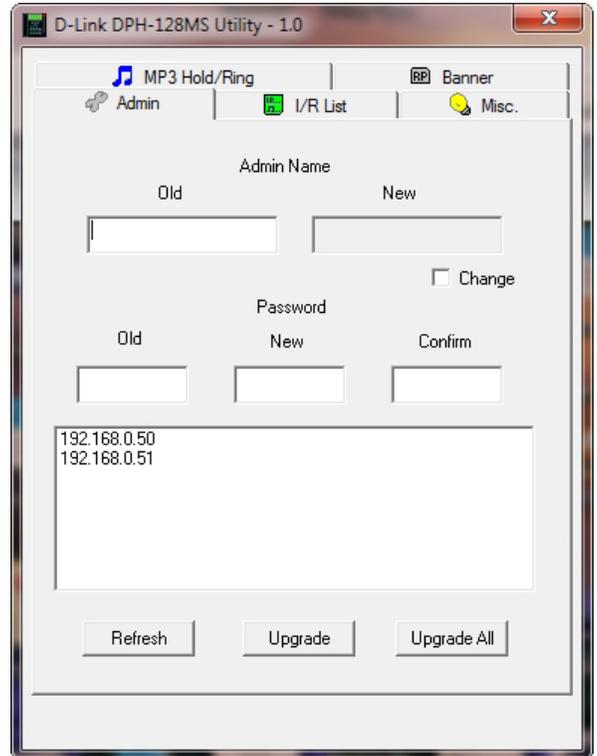

Note: The Administrator’s name and password only accepts A~Z, a~z, and/or 0~9 (ASCII Symbols are not accepted).

I/R List

Station: Select the station position you want to modify. It can be No. 1~20.

Name: The name of station. (Cannot be left blank if you want to use it).


URL: The URL address of the station. (Only the http protocol is supported).

Refresh: List all DPH-128MS IP Phone in your local network environment.

Download: Download the I/R list from a selected device.

Upload: Upload I/R list to a selected device.

Upload to All: Upload I/R list to all devices in list.

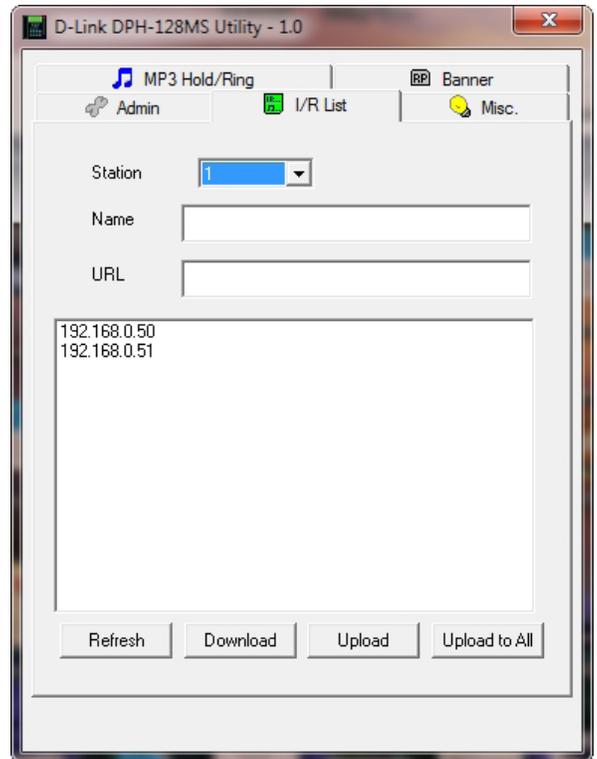

Note: Be sure to update all requested station positions (1-20) prior to clicking the “Upload” or “Upload to All” button. The DPH-128MS Utility will re-sort your I/R list before the upload to remove empty station positions. After the upload, the previous I/R list of the target phone will be replaced.

Misc.


Name: The current name of the “administrative account” on the device.

Password: The current account password of the administrator on the device.

Refresh: List all DPH-128MS IP Phones in your local network environment.

Upgrade: Update the specified configuration changes to the selected device.

Upgrade All: Update the specified configuration changes to all devices in the list.

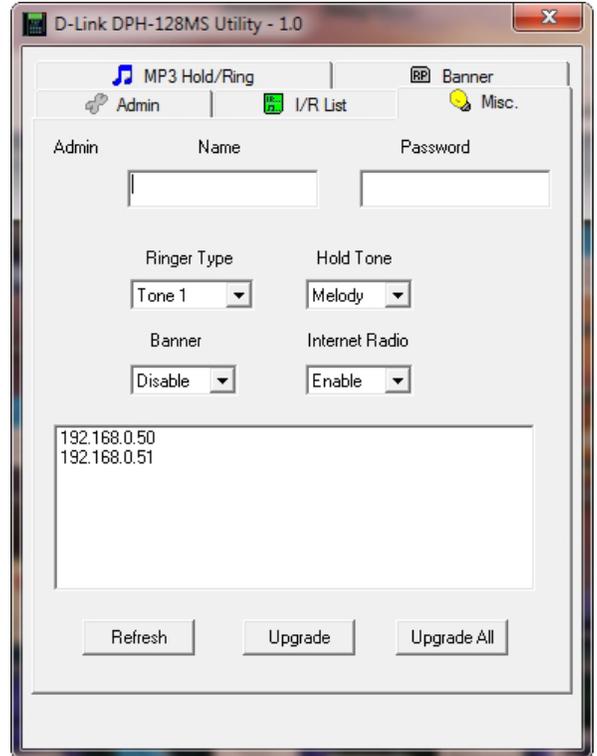

Contacting Technical Support

U.S. and Canadian customers can contact D-Link technical support through our web site or by phone.

Before you contact technical support, please have the following ready:

- Model number of the product (e.g. DPH-128MS)
- Hardware Revision (located on the bottom of the IP Phone (e.g. rev A1))
- Serial Number (s/n number located on the bottom of the IP Phone).

You can find software updates and user documentation on the D-Link website as well as frequently asked questions and answers to technical issues.

For customers within the United States:

Phone Support:
(888) 404-6262

Internet Support:
<http://support.dlink.com>

For customers within Canada:

Phone Support:
(888) 404-6262

Internet Support:
<http://support.dlink.com>

Registration



Product registration is entirely voluntary and failure to complete or return this form will not diminish your warranty rights.

Version 1.0
July 21, 2009